

# BT 2153-D LED C 50



## EXTRA LOW VOLTAGE ■ LED

- Circular recessed adjustable spotlight for LED SPOT module, maximum 1 520 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3 000 K and 4 000 K
- Up to 50 000 hours lamp life (L70B50)
- Luminous efficiency of system up to 99,8 lm/W
- Adjustable brackets for easier installation
- Housing and ring made of die-cast aluminium
- Static heat sink
- **Weight:** Approx. 0,5 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

### Driver(s)




### Standards

Class II | IP 20 | 650°

### Beam(s)



### Dimensions

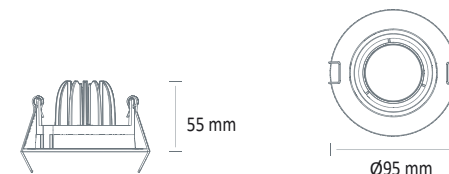

### Colour(s)



Ø80 mm

ITEM	LAMP LIFE	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
BT 2153-D LED C 50 900-930	50 000 Hours	8,8 W	11 W	967 lumens	87,9 lm/W	3000 K	90	F
BT 2153-D LED C 50 900-940	50 000 Hours	8,8 W	11 W	1018 lumens	92,5 lm/W	4000 K	90	F
BT 2153-D LED C 50 1400-830	50 000 Hours	12,8W	15,2 W	1450 lumens	95,2 lm/W	3000 K	80	F
BT 2153-D LED C 50 1400-840	50 000 Hours	12,8W	15,2 W	1520 lumens	99,8 lm/W	4000 K	80	F