

# BT 2153-D LED C 50



## Colour(s)



Ø80 mm



## EXTRA LOW VOLTAGE ■ LED

- Circular recessed adjustable spotlight for LED SPOT module, maximum 1 470 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3 000 K and 4 000 K
- Up to 50 000 hours lamp life (L70B50)
- Luminous efficiency of system up to 95,7 lm/W
- Adjustable brackets for easier installation
- Housing and ring made of die-cast aluminium
- Static heat sink
- **Weight:** Approx. 0,5 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

## Driver(s)



## Standards

Class II | IP 20 | 650°


## Efficiency energy class



## Beam(s)



## Dimensions

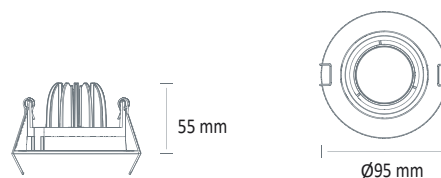

ITEM	LAMP LIFE	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
BT 2153-D LED C 50 900-930	50 000 Hours	12,3W	14,6W	900 lumens	61,5 lm/W	3000 K	90
BT 2153-D LED C 50 900-940	50 000 Hours	12,3W	14,6W	1060 lumens	72,4 lm/W	4000 K	90
BT 2153-D LED C 50 1400-830	25 000 Hours	12,9W	15,4W	1390 lumens	90,5 lm/W	3000 K	80
BT 2153-D LED C 50 1400-840	25 000 Hours	12,9W	15,4W	1470 lumens	95,7 lm/W	4000 K	80