

LE 4060 LED



Colour(s)



605x605 mm



RECESSED LUMINAIRES ■ LED

- Recessed luminaire for LINEAR LED module, maximum 7 708 lumens
- CRI of 90
- MacAdam Ellipse: 3 SDCM
- Available in 4 000 K
- 50 000 hours lamp life (L70B50)
- Luminous efficiency of system up to 154,6 lm/W
- Opal diffuser (DO) with frame made of polymethyl methacrylate (PMMA)
- Lay-in (LI) or lay-out (LO)
- Lay-out version proposed with visible frame
- Housing made of white painted steel
- Static heat sink
- **Weight:** approx. 6,57 kg
- **Included:** Fast connector (CORD)
- **Number of modules:** 2
- **Driver(s):** Fixed (C Fixed), Dimmable driver DALI (CDIMMDALI)
- **Option(s):** IP 65 built-in frame, Ready-to-mount kit (security wire, protection film) (KC)

Driver(s)




Standards

Class I | IP 20 / IP 65 (cadre) | 850°

Beam(s)



Dimensions

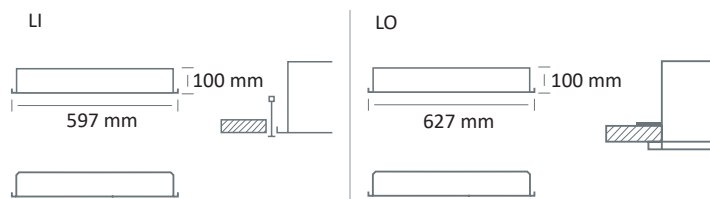

ITEM	MODULE	NB OF MODULE(S)	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LE 4060-LED-5000-940	LED SQ	2	32,9W	5092 lumens	154,6 lm/W	4000 K	90	C
LE 4060-LED-6500-940	LED SQ	2	44W	6600 lumens	149,9 lm/W	4000 K	90	C
LE 4060-LED-7800-940	LED SQ	2	51,9W	7708 lumens	148,6 lm/W	4000 K	90	C

Diffuser(s)

