

PR 2041-A1 LED



Colour(s)



LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 7 700 lumens
- CRI of 80 or 90
- MacAdam Ellipse : 2 SDCM
- Available in 3000 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- Luminous efficiency of system up to 140 lm/W
- 3-circuits track adaptor
- Head of spot made of die-cast aluminium and box made of painted steel
- Static heat sink
- Optical protection clear glass
- **Weight:** approx. 1,3 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Colour filters (FIL), Ceiling-mounted bracket (PAT)


Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions

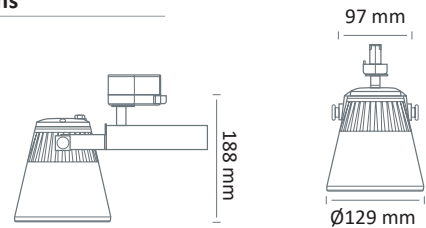

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	BEAM	EFFICIENCY ENERGY CLASS
PR 2041-A1 LED 3500-930	31W	34W	3450 lumens	101,5 lm/W	3000 K	90	B	E
PR 2041-A1 LED 3500-940	31W	34W	3850 lumens	113,2 lm/W	4000 K	90	B	E
PR 2041-A1 LED 3500-830	25W	28W	3615 lumens	129,1 lm/W	3000 K	80	B	D
PR 2041-A1 LED 3500-840	25W	28W	3802 lumens	135,8 lm/W	4000 K	80	B	D
PR 2041-A1 LED 4000-930	29W	32W	3775 lumens	118 lm/W	3000 K	90	A	E
PR 2041-A1 LED 4000-940	29W	32W	4250 lumens	132,8 lm/W	4000 K	90	A	E
PR 2041-A1 LED 4000-830	31W	34W	4275 lumens	125,7 lm/W	3000 K	80	B	D
PR 2041-A1 LED 4000-840	31W	34W	4500 lumens	132,4 lm/W	4000 K	80	B	D
PR 2041-A1 LED 5000-830	39W	43W	5075 lumens	118 lm/W	3000 K	80	B	D
PR 2041-A1 LED 5000-840	39W	43W	5350 lumens	124,4 lm/W	4000 K	80	B	D
PR 2041-A1 LED 7000-830	49W	55W	7325 lumens	133,2 lm/W	3000 K	80	A	D
PR 2041-A1 LED 7000-840	49W	55W	7700 lumens	140 lm/W	4000 K	80	A	D