

PR 2041-A1 LED

LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 7 700 lumens
- CRI of 80 or 90
- MacAdam Ellipse : 2 SDCM
- Available in 3000 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- Luminous efficiency of system up to 145 lm/W
- 3-circuits track adaptor
- Head of spot made of die-cast aluminium and box made of painted steel
- Static heat sink
- Optical protection clear glass
- **Weight:** approx. 1,3 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Ceiling-mounted bracket (PAT)



Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions

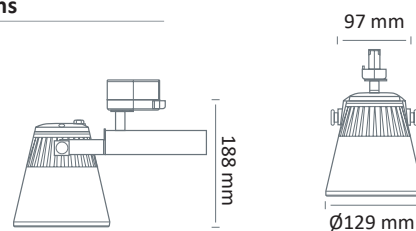

Colour(s)



ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	BEAM	EFFICIENCY ENERGY CLASS
PR 2041-A1 LED 2000-930	14W	1918 lumens	137,9 lm/W	3000 K	90	B	D
PR 2041-A1 LED 2000-940	14W	2016 lumens	145 lm/W	4000 K	90	B	D
PR 2041-A1 LED 3500-830	28W	3615 lumens	129,1 lm/W	3000 K	80	B	D
PR 2041-A1 LED 3500-840	28W	3802 lumens	135,8 lm/W	4000 K	80	B	D
PR 2041-A1 LED 3500-930	25,4 W	3434 lumens	135,2 lm/W	3000 K	90	B	D
PR 2041-A1 LED 3500-940	25,4 W	3629 lumens	142,9 lm/W	4000 K	90	B	D
PR 2041-A1 LED 4000-830	34W	4275 lumens	125,7 lm/W	3000 K	80	B	D
PR 2041-A1 LED 4000-840	34W	4500 lumens	132,4 lm/W	4000 K	80	B	D
PR 2041-A1 LED 4000-930	31,7 W	4143 lumens	130,4 lm/W	3000 K	90	B	D
PR 2041-A1 LED 4000-940	29,4 W	4139 lumens	140,6 lm/W	4000 K	90	B	D
PR 2041-A1 LED 5000-830	43W	5075 lumens	118 lm/W	3000 K	80	B	D
PR 2041-A1 LED 5000-840	43W	5350 lumens	124,4 lm/W	4000 K	80	B	D
PR 2041-A1 LED 5500-930	41,8W	5262 lumens	125,9 lm/W	3000 K	90	B	D
PR 2041-A1 LED 5500-940	41,8W	5592 lumens	133,8 lm/W	4000 K	90	B	D
PR 2041-A1 LED 7000-830	55W	7325 lumens	133,2 lm/W	3000 K	80	A	D
PR 2041-A1 LED 7000-840	55W	7700 lumens	140 lm/W	4000 K	80	A	D