

■ RG 2509 LED



Colour(s)



BATTEN LUMINAIRES / LED FLEX ■ LED

- Linear adjustable strip light for LINEAR LED module, maximum 18 W
- CRI of 80
- Can be mounted continuous row up to 10 meters
- 50 000 hours lamp life
- Luminous efficiency of system up to 106 lm/W
- Available in 3 000 K and 4 000 K
- Housing made of painted steel, plastic endcap, opal diffuser
- Static heat sink
- **Weight** : Approx. 0,3 kg
- **Driver(s)** : Fixed
- **Accessorie(s)** : Flexible joints 150 mm, 300 mm, 1 200 mm;
Power Supply 1 800 mm

Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions

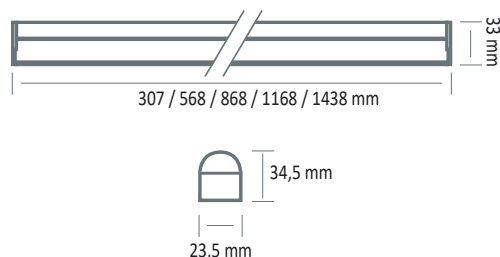

ITEM	LENGTH (MM)	MAX NUMBER OF BATTEN LUMINAIRES / LINE	POWER	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
RG 2509 LED-466-840	307	20	5W	466 lumens	93 lm/W	4000 K	80
RG 2509 LED-895-840	568	15	9W	895 lumens	99,5 lm/W	4000 K	80
RG 2509 LED-1262-840	868	12	12W	1262 lumens	105 lm/W	4000 K	80
RG 2509 LED-1592-840	1168	10	15W	1592 lumens	106 lm/W	4000 K	80
RG 2509 LED-1781-840	1438	8	18W	1781 lumens	99 lm/W	4000 K	80
RG 2509 LED-425-830	307	20	5W	425 lumens	85 lm/W	3000 K	80
RG 2509 LED-837-830	568	15	9W	837 lumens	93 lm/W	3000 K	80
RG 2509 LED-1181-830	868	12	12W	1181 lumens	98,5 lm/W	3000 K	80
RG 2509 LED-1491-830	1168	10	15W	1491 lumens	99,5 lm/W	3000 K	80
RG 2509 LED-1734-830	1438	8	18W	1734 lumens	96,5 lm/W	3000 K	80