

# EO 2241-A LED



## Colour(s)



Ø180 mm



## ORIENTABLE AND ADJUSTABLE - LED

- Circular recessed orientable spotlight for LED SPOT module, maximum 7 700 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 151,2 lm/W
- Springs in pressure for easier installation
- Ring made of die-cast aluminium
- Static heat sink
- **Weight:** Approx. 1,8 kg
- **Driver(s):** Fixe (C Fixed), Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD), Colour filters (FIL)

### Driver(s)




### Standards

Classe I | IP 20 | 650°

### Beam(s)



### Dimensions

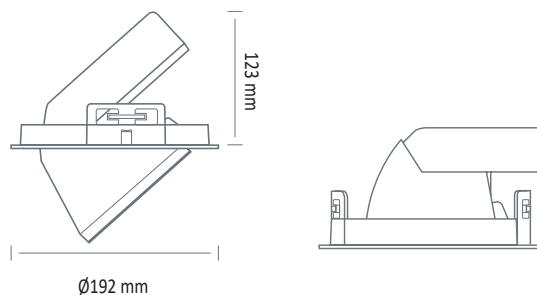

| ITEM               | POWER | CONSUMPTION | LUMINOUS FLUX | SYSTEM EFFICIENCY | COLOUR TEMPERATURE | CRI | EFFICIENCY ENERGY CLASS |
|--------------------|-------|-------------|---------------|-------------------|--------------------|-----|-------------------------|
| EO 2241-A 3000-830 | 19W   | 21W         | 3025 lumens   | 144 lm/W          | 3000 K             | 80  | D                       |
| EO 2241-A 3000-840 | 19W   | 21W         | 3175 lumens   | 151,2 lm/W        | 4000 K             | 80  | D                       |
| EO 2241-A 3500-930 | 31W   | 34W         | 3450 lumens   | 101,5 lm/W        | 3000 K             | 90  | E                       |
| EO 2241-A 3500-940 | 31W   | 34W         | 3850 lumens   | 113,2 lm/W        | 4000 K             | 90  | E                       |
| EO 2241-A 4500-830 | 31W   | 34W         | 4275 lumens   | 125,7 lm/W        | 3000 K             | 80  | D                       |
| EO 2241-A 4500-840 | 31W   | 34W         | 4500 lumens   | 132,3 lm/W        | 4000 K             | 80  | D                       |
| EO 2241-A 4500-930 | 39W   | 43W         | 4150 lumens   | 96,5 lm/W         | 3000 K             | 90  | E                       |
| EO 2241-A 4500-940 | 39W   | 43W         | 4575 lumens   | 106,4 lm/W        | 4000 K             | 90  | E                       |
| EO 2241-A 5000-830 | 39W   | 43W         | 5075 lumens   | 118 lm/W          | 3000 K             | 80  | D                       |
| EO 2241-A 5000-840 | 39W   | 43W         | 5350 lumens   | 124,4 lm/W        | 4000 K             | 80  | D                       |
| EO 2241-A 7500-830 | 49W   | 55W         | 7325 lumens   | 133 lm/W          | 3000 K             | 80  | D                       |
| EO 2241-A 7500-840 | 49W   | 55W         | 7700 lumens   | 140 lm/W          | 4000 K             | 80  | D                       |