







EO 2245-1 LED



116 x 116 mm  





EO 2245-2 LED



116 x 240 mm  



EO 2245-3 LED

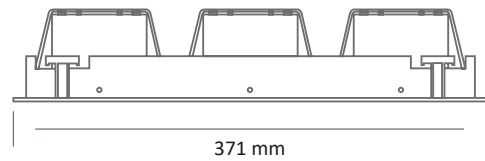

116 x 360 mm  

Colour(s)



EO 2245 LED

- Recessed orientable spotlight, simple, double or triple gimbal modules, for LED SPOT module, maximum 3 x 4 050 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 163,6 lm/W
- Springs in pressure for easier installation
- Static heat sink
- **Weight:** approx. 1 kg (simple), 2 kg (double), 3 kg (triple)
- **Driver(s):** Fixe (C Fixed), Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

Driver(s)



Standards

Class I | IP 20 | 650°

Beam(s)



ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
EO 2245-1 LED-1400-930	10W	11W	1375 lumens	125 lm/W	3000 K	90	E
EO 2245-1 LED-1400-940	10W	11W	1425 lumens	129,5 lm/W	4000 K	90	E
EO 2245-1 LED-1800-830	10W	11W	1725 lumens	156,8 lm/W	3000 K	80	D
EO 2245-1 LED-1800-840	10W	11W	1800 lumens	163,6 lm/W	4000 K	80	D
EO 2245-1 LED-2000-930	15W	17W	1975 lumens	116 lm/W	3000 K	90	E
EO 2245-1 LED-2000-940	15W	17W	2250 lumens	132,3 lm/W	4000 K	90	E
EO 2245-1 LED-2500-830	15W	17W	2475 lumens	145,5 lm/W	3000 K	80	D
EO 2245-1 LED-2500-840	15W	17W	2600 lumens	152,9 lm/W	4000 K	80	D
EO 2245-1 LED-3500-930	27W	30W	3125 lumens	104 lm/W	3000 K	90	E
EO 2245-1 LED-3500-940	27W	30W	3475 lumens	115,8 lm/W	4000 K	90	E
EO 2245-1 LED-4000-830	27W	30W	3850 lumens	128,3 lm/W	3000 K	80	D
EO 2245-1 LED-4000-840	27W	30W	4050 lumens	135 lm/W	4000 K	80	D
EO 2245-2 LED-1400-930	2x10W	2x11W	2x1375 lumens	125 lm/W	3000 K	90	E
EO 2245-2 LED-1400-940	2x10W	2x11W	2x1425 lumens	129,5 lm/W	4000 K	90	E
EO 2245-2 LED-1800-830	2x10W	2x11W	2x1725 lumens	156,8 lm/W	3000 K	80	D
EO 2245-2 LED-1800-840	2x10W	2x11W	2x1800 lumens	163,6 lm/W	4000 K	80	D
EO 2245-2 LED-2000-930	2x15W	2x17W	2x1975 lumens	116 lm/W	3000 K	90	E
EO 2245-2 LED-2000-940	2x15W	2x17W	2x2250 lumens	132,3 lm/W	4000 K	90	E
EO 2245-2 LED-2500-830	2x15W	2x17W	2x2475 lumens	145,5 lm/W	3000 K	80	D
EO 2245-2 LED-2500-840	2x15W	2x17W	2x2600 lumens	152,9 lm/W	4000 K	80	D
EO 2245-2 LED-3500-930	2x27W	2x30W	2x3125 lumens	104 lm/W	3000 K	90	E
EO 2245-2 LED-3500-940	2x27W	2x30W	2x3475 lumens	115,8 lm/W	4000 K	90	E
EO 2245-2 LED-4000-830	2x27W	2x30W	2x3850 lumens	128,3 lm/W	3000 K	80	D
EO 2245-2 LED-4000-840	2x27W	2x30W	2x4050 lumens	135 lm/W	4000 K	80	D
EO 2245-3 LED-1400-930	3x10W	3x11W	3x1375 lumens	125 lm/W	3000 K	90	E
EO 2245-3 LED-1400-940	3x10W	3x11W	3x1425 lumens	129,5 lm/W	4000 K	90	E
EO 2245-3 LED-1800-830	3x10W	3x11W	3x1725 lumens	156,8 lm/W	3000 K	80	D
EO 2245-3 LED-1800-840	3x10W	3x11W	3x1800 lumens	163,6 lm/W	4000 K	80	D
EO 2245-3 LED-2000-930	3x15W	3x17W	3x1975 lumens	116 lm/W	3000 K	90	E
EO 2245-3 LED-2000-940	3x15W	3x17W	3x2250 lumens	132,3 lm/W	4000 K	90	E
EO 2245-3 LED-2500-830	3x15W	3x17W	3x2475 lumens	145,5 lm/W	3000 K	80	D
EO 2245-3 LED-2500-840	3x15W	3x17W	3x2600 lumens	152,9 lm/W	4000 K	80	D
EO 2245-3 LED-3500-930	3x27W	3x30W	3x3125 lumens	104 lm/W	3000 K	90	E
EO 2245-3 LED-3500-940	3x27W	3x30W	3x3475 lumens	115,8 lm/W	4000 K	90	E
EO 2245-3 LED-4000-830	3x27W	3x30W	3x3850 lumens	128,3 lm/W	3000 K	80	D
EO 2245-3 LED-4000-840	3x27W	3x30W	3x4050 lumens	135 lm/W	4000 K	80	D