

GR 3915 LED



Colour(s)




GORGES LED

Luminous gorges architectural system, trimless, for orientable LED projectors. The system includes:



- Angles made of extruded aluminium profile (1m, 2m, 3m length)
- White or black 1-circuit tracks (1m, 2m, 3m, 4m length) and accessories
- Accent lighting LED projectors PR 3915 LED
- Backlighting with batten LED luminaires RG 2509 (optional)
- **Accessorie(s):** mechanically-welded endcap, 90° angle

Dimensions

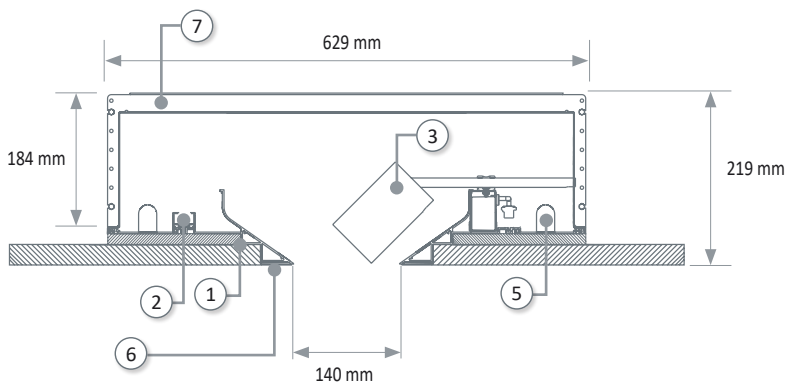



- ① Angle made of extruded aluminium profile
- ② 1-circuit track
- ③ PR 3915 LED projector
- ⑤ Backlighting with batten LED luminaire RG 2509 (optional)
- ⑥ Finish coating
- ⑦ Optional box

ALUMINIUM PROFILE

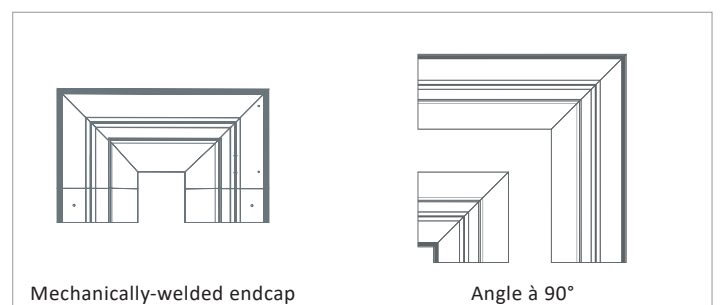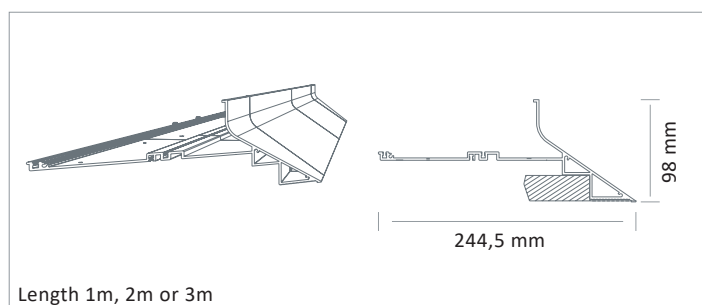

GR 3915 LED

1 CIRCUIT TRACK

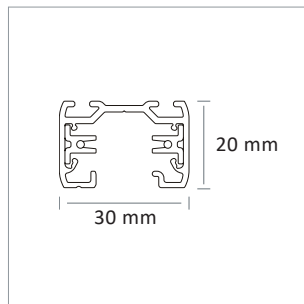

ACCENT LIGHTING - PR 3915 LED

- Orientable projector for LED SPOT module, maximum 1498 lumens
- MacAdam Ellipse: 2 SDCM
- CRI of 95
- Available in 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B50)
- Luminous efficiency of system up to 99 lm/W
- 1-circuits track adaptor
- Housing and box made of painted powder aluminium
- Static heat sink
- Optical silicone lens
- **Weight:** approx. 1,20 kg
- **Driver(s):** Fixe (C Fixed)
- **Option(s):** Beam filter (s) (FF), Honeycomb diffuser (N.AB)



Driver(s)




Standards

Class II | IP 20 | 650°

Beam(s)



Dimensions

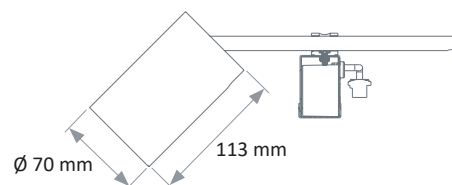

| ITEM | CONSUMPTION | LUMINOUS FLUX | SYSTEM EFFICIENCY | COLOUR TEMPERATURE | CRI | EFFICIENCY ENERGY CLASS |
|----------------------|-------------|---------------|-------------------|--------------------|-----|-------------------------|
| PR 3915 LED 800-930 | 8,6W | 787 lumens | 91,2 lm/W | 3000 K | 95 | E |
| PR 3915 LED 800-935 | 8,6W | 828 lumens | 96 lm/W | 3500 K | 95 | D |
| PR 3915 LED 850-940 | 8,6W | 854 lumens | 99 lm/W | 4000 K | 95 | D |
| PR 3915 LED 950-930 | 11W | 965 lumens | 87,7 lm/W | 3000 K | 95 | E |
| PR 3915 LED 1000-935 | 11W | 1015 lumens | 92,3 lm/W | 3500 K | 95 | D |
| PR 3915 LED 1050-940 | 11W | 1047 lumens | 95,2 lm/W | 4000 K | 95 | D |
| PR 3915 LED 1250-930 | 16W | 1248 lumens | 78 lm/W | 3000 K | 95 | E |
| PR 3915 LED 1300-935 | 16W | 1312 lumens | 82 lm/W | 3500 K | 95 | D |
| PR 3915 LED 1350-940 | 16W | 1354 lumens | 84,6 lm/W | 4000 K | 95 | D |
| PR 3915 LED 1400-930 | 17,1W | 1381 lumens | 80,6 lm/W | 3000 K | 95 | E |
| PR 3915 LED 1450-935 | 17,1W | 1452 lumens | 84,8 lm/W | 3500 K | 95 | D |
| PR 3915 LED 1500-940 | 17,1W | 1498 lumens | 87,5 lm/W | 4000 K | 95 | D |

INDIRECT LIGHTING - RG 2509 LED



Colour(s)



Driver(s)



Efficiency energy class



Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions



| ITEM | LENGTH (MM) | MAX NUMBER OF BATTEN LUMINAIRES / LINE | POWER | LUMINOUS FLUX | COLOUR TEMPERATURE | CRI |
|----------------------|-------------|--|-------|---------------|--------------------|-----|
| RG 2509 LED-466-840 | 307 | 20 | 5W | 466 lumens | 4000 K | 80 |
| RG 2509 LED-895-840 | 568 | 15 | 9W | 895 lumens | 4000 K | 80 |
| RG 2509 LED-1262-840 | 868 | 12 | 12W | 1262 lumens | 4000 K | 80 |
| RG 2509 LED-1592-840 | 1168 | 10 | 15W | 1592 lumens | 4000 K | 80 |
| RG 2509 LED-1781-840 | 1438 | 8 | 18W | 1781 lumens | 4000 K | 80 |
| RG 2509 LED-425-830 | 307 | 20 | 5W | 425 lumens | 3000 K | 80 |
| RG 2509 LED-837-830 | 568 | 15 | 9W | 837 lumens | 3000 K | 80 |
| RG 2509 LED-1181-830 | 868 | 12 | 12W | 1181 lumens | 3000 K | 80 |
| RG 2509 LED-1491-830 | 1168 | 10 | 15W | 1491 lumens | 3000 K | 80 |
| RG 2509 LED-1734-830 | 1438 | 8 | 18W | 1734 lumens | 3000 K | 80 |