

AR 1528 LED



Colour(s)



HIGH BAY ■ LED

- High bay for LED SPOT module, maximum 4 023 lumens
- CRI of 90
- MacAdam Ellipse : 3 SDCM
- Available in 2 700 K, 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 161,5 lm/W
- Diffuser made of faceted aluminium
- Housing made of embossed aluminium
- Static heat sink
- **Weight** : Approx. 4,4 kg
- **Included** : Suspension kit (KS)
- **Driver(s)** : Fixed, Dimmable DALI
- **Option(s)** : Fast connector (CORD), E27

Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions

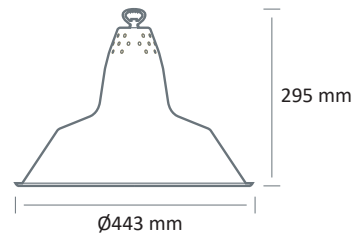

Performance des modules d'éclairage métiers

ITEM	SECTION	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
AR 1528 LED 3600-927	Bakery	24,1 W	26,8 W	3567 lumens	133,2 lm/W	2700 K	90	-
AR 1528 LED 2700-930	Butchery	29,4 W	32,7 W	2733 lumens	83,7 lm/W	3000 K	90	-

Performance des modules à haute efficacité (HE) IRC 90 avec R9>80

ITEM	ELIGIBILITY CEE	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
AR 1528 LED HE 3000-930	CEE	16,8 W	18,7 W	3010 lumens	161,3 lm/W	3000 K	90	E
AR 1528 LED HE 3000-935	CEE	16,8 W	18,7 W	2991 lumens	160,2 lm/W	3500 K	90	E
AR 1528 LED HE 3000-940	CEE	16,8 W	18,7 W	3015 lumens	161,5 lm/W	4000 K	90	E
AR 1528 LED HE 4000-930	CEE	24,1 W	26,8 W	4016 lumens	150 lm/W	3000 K	90	E
AR 1528 LED HE 4000-935	CEE	24,1 W	26,8 W	3991 lumens	149 lm/W	3500 K	90	E
AR 1528 LED HE 4000-940	CEE	24,1 W	26,8 W	4023 lumens	150,2 lm/W	4000 K	90	E

Option(s)



E27