

## DL 3977 LED



### Colour(s)



Ø200 mm



## DOWNLIGHTS ■ LED

- Recessed low luminance downlight for LED SPOT module, with a high luminous flux for high-rise installations, maximum 10 164 lumens
- MacAdam Ellipse : 3 SDCM
- CRI of 80
- Faceted aluminium reflector
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 165 lm/W
- Adjustable brackets for easier installation
- Ring made of of painted steel
- Static heat sink
- **Weight:** 3,35 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

### Driver(s)



### Standards

Class I | IP 20 | 650°


### Efficiency energy class



### Beam(s)



### Dimensions

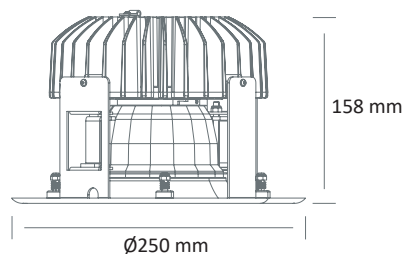

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
DL 3977 LED-8000-830	45,3W	49,3W	7691 lumens	156 lm/W	3000 K	80
DL 3977 LED-8000-840	45,3W	49,3W	8134 lumens	165 lm/W	4000 K	80
DL 3977 LED-10000-830	59W	64W	9630 lumens	150,5 lm/W	3000 K	80
DL 3977 LED-10000-840	59W	64W	10164 lumens	158,5 lm/W	4000 K	80