

# EO 2225 LED

# ORIENTABLE AND ADJUSTABLE . LED



- Recessed orientable spotlight, for LED SPOT module, maximum 4 050 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 163,6 lm/W
- Springs in pressure for easier installation
- Static heat sink
- **Weight:** Approx. 1 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

## Driver(s)




## Standards

Class I | IP 20 | 650°

## Beam(s)



## Dimensions

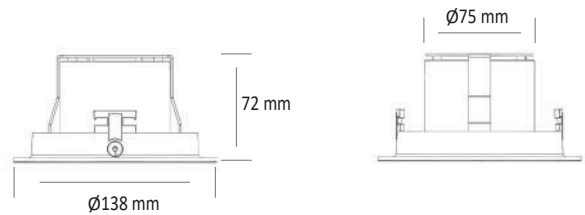

## Colour(s)



Ø118 mm



ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
EO 2225 LED-1800-830	11W	1725 lumens	156,8 lm/W	3000 K	80	D
EO 2225 LED-1800-840	11W	1800 lumens	163,6 lm/W	4000 K	80	D
EO 2225 LED-2000-930	14W	1918 lumens	137,9 lm/W	3000 K	90	D
EO 2225 LED-2000-940	14W	2016 lumens	145 lm/W	4000 K	90	D
EO 2225 LED-2500-830	17W	2475 lumens	145,5 lm/W	3000 K	80	D
EO 2225 LED-2500-840	17W	2600 lumens	152,9 lm/W	4000 K	80	D
EO 2225 LED-3500-930	25,4W	3434 lumens	135,2 lm/W	3000 K	90	D
EO 2225 LED-3500-940	25,4W	3629 lumens	142,9 lm/W	4000 K	90	D
EO 2225 LED-4000-830	30W	3850 lumens	128,3 lm/W	3000 K	80	D
EO 2225 LED-4000-840	30W	4050 lumens	135 lm/W	4000 K	80	D