

PR 2041-B1 LED



Colour(s)



LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 4 500 lumens
- CRI of 80 or 90
- MacAdam Ellipse : 2 SDCM
- Available in 3000 K, 3500 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- Luminous efficiency of system up to 151,2 lm/W
- 3-circuits track adaptor
- Housing made of die-cast aluminium and box made of painted steel
- Static heat sink
- Optical protection clear glass
- **Weight:** approx. 1,4 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Colour filters (FIL)

Driver(s)



Standards

Class I | IP 20 | 650°


Efficiency energy class



Beam(s)



Dimensions

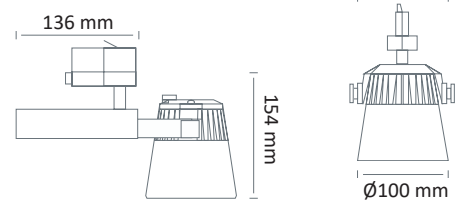

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
PR 2041-B1 LED-3000-930	25 W	27 W	2975 lumens	110,2 lm/W	3000 K	90
PR 2041-B1 LED-3000-935	25 W	27 W	3100 lumens	114,8 lm/W	3500 K	90
PR 2041-B1 LED-3000-940	25 W	27 W	3325 lumens	123,1 lm/W	4000 K	90
PR 2041-B1 LED-3000-830	19 W	21 W	3025 lumens	144,1 lm/W	3000 K	80
PR 2041-B1 LED-3000-840	19 W	21 W	3175 lumens	151,2 lm/W	4000 K	80
PR 2041-B1 LED-4500-830	31 W	34 W	4275 lumens	125,7 lm/W	3000 K	80
PR 2041-B1 LED-4500-840	31 W	34 W	4500 lumens	132,3 lm/W	4000 K	80