

PR 2070 LED



Colour(s)



LED PROJECTORS

- Orientable projector LED SPOT module, maximum 5 592 lumens
- CRI of 80 or 90
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K and 4000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 142,9 lm/W
- 3-circuits track adaptor
- Head of spot made of die-cast aluminium
- Static heat sink
- Optical protection clear glass
- **Weight** : Approx. 1 kg
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI)
- **Option(s)** : Business Module

Driver(s)




Standards

Class II | IP 20 | 650°

Beam(s)



Dimensions

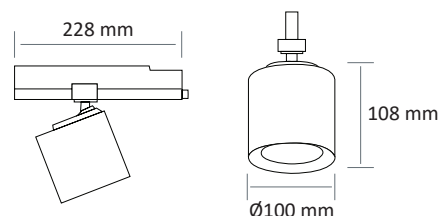

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 2070 LED 3500-830	28W	3700 lumens	132 lm/W	3000 K	80	D
PR 2070 LED 3500-840	28W	3875 lumens	138,5 lm/W	4000 K	80	D
PR 2070 LED 3500-930	25,4W	3434 lumens	135,2 lm/W	3000 K	90	D
PR 2070 LED 3500-940	25,4W	3629 lumens	142,9 lm/W	4000 K	90	D
PR 2070 LED 4000-930	31,7W	4143 lumens	130,4 lm/W	3000 K	90	D
PR 2070 LED 4000-940	29,4W	4139 lumens	140,6 lm/W	4000 K	90	D
PR 2070 LED 4500-830	35W	4275 lumens	122 lm/W	3000 K	80	D
PR 2070 LED 4500-840	35W	4500 lumens	128,5 lm/W	4000 K	80	D
PR 2070 LED 5500-930	41,8W	5262 lumens	125,9 lm/W	3000 K	90	D
PR 2070 LED 5500-940	41,8W	5592 lumens	133,8 lm/W	4000 K	90	D