

PR 2041-A2 LED



Colour(s)



LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 2 x 7 700 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3000 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- 3-circuits track adaptor
- Luminous efficiency of system up to 145 lm/W
- Head of spot made of die-cast aluminium and box made of painted steel
- Static heat sink
- Optical protection clear glass
- **Weight:** approx. 2,3 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Ceiling-mounted bracket (PAT)

Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions

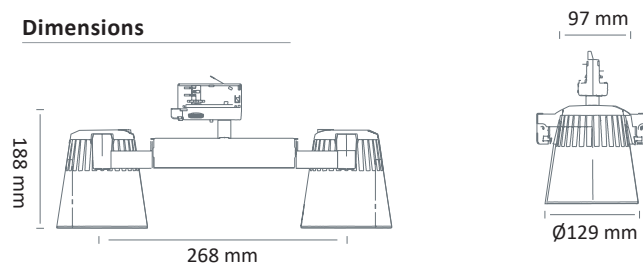

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	BEAM	EFFICIENCY ENERGY CLASS
PR 2041-A2 LED 2000-930	2x14W	2x1918 lumens	2x137,9 lm/W	3000 K	90	B	D
PR 2041-A2 LED 2000-940	2x14W	2x2016 lumens	2x145 lm/W	4000 K	90	B	D
PR 2041-A2 LED 3500-830	2x28W	2x3615 lumens	2x129,1 lm/W	3000 K	80	B	D
PR 2041-A2 LED 3500-840	2x28W	2x3802 lumens	2x135,8 lm/W	4000 K	80	B	D
PR 2041-A2 LED 3500-930	2x25,4 W	2x3434 lumens	2x135,2 lm/W	3000 K	90	B	D
PR 2041-A2 LED 3500-940	2x25,4 W	2x3629 lumens	2x142,9 lm/W	4000 K	90	B	D
PR 2041-A2 LED 4000-830	2x34W	2x4275 lumens	2x125,7 lm/W	3000 K	80	B	D
PR 2041-A2 LED 4000-840	2x34W	2x4500 lumens	2x132,4 lm/W	4000 K	80	B	D
PR 2041-A2 LED 4000-930	31,7 W	2x4143 lumens	2x130,4 lm/W	3000 K	90	B	D
PR 2041-A2 LED 4000-940	29,4 W	2x4139 lumens	2x140,6 lm/W	4000 K	90	B	D
PR 2041-A2 LED 5000-830	2x43W	2x5075 lumens	2x118 lm/W	3000 K	80	B	D
PR 2041-A2 LED 5000-840	2x43W	2x5350 lumens	2x124,4 lm/W	4000 K	80	B	D
PR 2041-A2 LED 5500-930	41,8W	2x5262 lumens	2x125,9 lm/W	3000 K	90	B	D
PR 2041-A2 LED 5500-940	41,8W	2x5592 lumens	2x133,8 lm/W	4000 K	90	B	D
PR 2041-A2 LED 7000-830	2x55W	2x7325 lumens	2x133,2 lm/W	3000 K	80	A	D
PR 2041-A2 LED 7000-840	2x55W	2x7700 lumens	2x140 lm/W	4000 K	80	A	D