



- Orientable projector for LED SPOT module, maximum 2 x 4 500 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3000 K, 3500 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- 3-circuits track adaptor
- Luminous efficiency of system up to 151,2 lm/W
- Head of spot made of die-cast aluminium and box made of painted steel
- Static heat sink
- Optical protection clear glass
- **Weight:** approx. 1,9 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Colour filters (FIL)

### Driver(s)




### Standards

Class I | IP 20 | 650°

### Beam(s)



### Dimensions

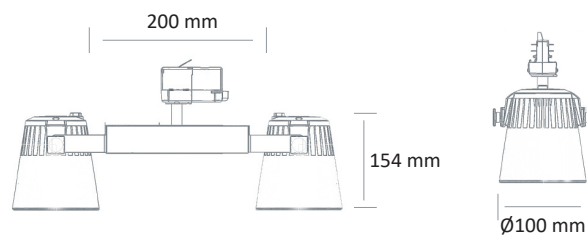

### Colour(s)



ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	EFFICIENCY OF SYSTEM	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 2041-B2 LED-3000-930	2x25 W	2x27 W	2x2975 lumens	110,2 lm/W	3000 K	90	E
PR 2041-B2 LED-3000-935	2x25 W	2x27 W	2x3100 lumens	114,8 lm/W	3500 K	90	E
PR 2041-B2 LED-3000-940	2x25 W	2x27 W	2x3325 lumens	123,1 lm/W	4000 K	90	E
PR 2041-B2 LED-3000-830	2x19 W	2x21 W	2x3025 lumens	144,1 lm/W	3000 K	80	D
PR 2041-B2 LED-3000-840	2x19 W	2x21 W	2x3175 lumens	151,2 lm/W	4000 K	80	D
PR 2041-B2 LED-4500-830	2x31 W	2x34 W	2x4275 lumens	125,7 lm/W	3000 K	80	D
PR 2041-B2 LED-4500-840	2x31 W	2x34 W	2x4500 lumens	132,3 lm/W	4000 K	80	D