

PR 2041-B2 LED



Colour(s)



LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 2 x 4 500 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3000 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- 3-circuits track adaptor
- Luminous efficiency of system up to 151,2 lm/W
- Head of spot made of die-cast aluminium and box made of painted steel
- Static heat sink
- Optical protection clear glass
- **Weight:** approx. 1,9 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)

Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions

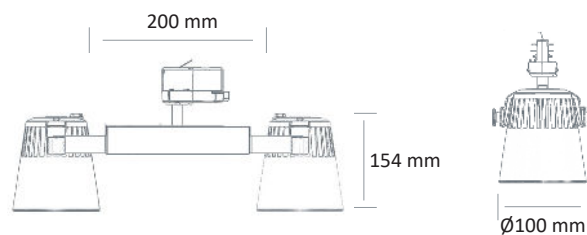

ITEM	CONSUMPTION	LUMINOUS FLUX	EFFICIENCY OF SYSTEM	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 2041-B2 LED 2000-930	2x14W	2x1918 lumens	137,9 lm/W	3000 K	90	D
PR 2041-B2 LED 2000-940	2x14W	2x2016 lumens	145 lm/W	4000 K	90	D
PR 2041-B2 LED-3000-830	2x21 W	2x3025 lumens	144,1 lm/W	3000 K	80	D
PR 2041-B2 LED-3000-840	2x21 W	2x3175 lumens	151,2 lm/W	4000 K	80	D
PR 2041-B2 LED 3500-930	2x25,4 W	2x3434 lumens	135,2 lm/W	3000 K	90	D
PR 2041-B2 LED 3500-940	2x25,4 W	2x3629 lumens	142,9 lm/W	4000 K	90	D
PR 2041-B2 LED 4000-930	2x31,7 W	2x4143 lumens	130,4 lm/W	3000 K	90	D
PR 2041-B2 LED 4000-940	2x29,4 W	2x4139 lumens	140,6 lm/W	4000 K	90	D
PR 2041-B2 LED-4500-830	2x34 W	2x4275 lumens	125,7 lm/W	3000 K	80	D
PR 2041-B2 LED-4500-840	2x34 W	2x4500 lumens	132,3 lm/W	4000 K	80	D