

LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 5592 lumens
- CRI of 80 and 90
- MacAdam Ellipse: 2 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 150,8 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- Static heat sink
- Optical protection clear glass
- **Weight:** approx. 1,1 kg
- **Driver(s) :** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s) :** food module



Driver(s)




Standards

Class II | IP 20 | 650°

Beam(s)



Dimensions

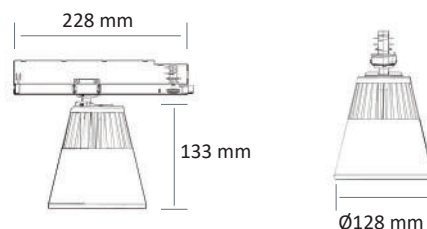

Colour(s)



ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	BEAMS	EFFICIENCY ENERGY CLASS
PR 2071 LED 3000-930	34W	3475 lumens	102 lm/W	3000 K	90	B	E
PR 2071 LED 3500-830	28W	3675 lumens	131,2 lm/W	3000 K	80	B	D
PR 2071 LED 3500-840	28W	3775 lumens	134,8 lm/W	4000 K	80	B	D
PR 2071 LED 3500-930	25,4 W	3434 lumens	135,2 lm/W	3000 K	90	B	D
PR 2071 LED 3500-940	25,4 W	3629 lumens	142,9 lm/W	4000 K	90	B	D
PR 2071 LED 4000-930	31,7 W	4143 lumens	130,4 lm/W	3000 K	90	B	D
PR 2071 LED 4000-940	29,4 W	4139 lumens	140,6 lm/W	4000 K	90	B	D
PR 2071 LED 4200-830	34W	4250 lumens	125 lm/W	3000 K	80	B	D
PR 2071 LED 4200-840	34W	4375 lumens	128,7 lm/W	4000 K	80	B	D
PR 2071 LED 4800-830	32W	4700 lumens	146,8 lm/W	3000 K	80	A	D
PR 2071 LED 4800-840	32W	4825 lumens	150,8 lm/W	4000 K	80	A	D
PR 2071 LED 5500-930	41,8W	5262 lumens	125,9 lm/W	3000 K	90	B	D
PR 2071 LED 5500-940	41,8W	5592 lumens	133,8 lm/W	4000 K	90	B	D