

RB 2329 LED WHITE IP54



BATTEN LUMINAIRES / LED FLEX ■ LED

- Waterproof IP54 LED FLEX, 24 volts, maximum 1800 lumens / meter
- CRI of 80
- MacAdam Ellipse: 4 SDCM
- Available in 2700 K, 3000 K, 4000 K, 6500 K
- Up to 30 000 hours lamp life
- Luminous efficiency of system up to 148 lm/W
- Plug-type connector for power supply and electrical connection of led flex
- 3M self-adhesive led flex for easier installation
- **Weight:** Approx. 0,5 kg
- **Length(s):** Led flex total length 5000 mm or 6000 mm divisible
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI), 1-10 V Driver (1-10V)
- **LED flex larger than 8 W/m, it is recommended to associate an aluminum profile**

Driver(s)




Standards

Class III | IP 54 | 650°

Beam(s)



Dimensions

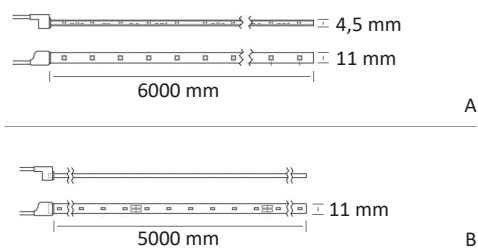

	ITEM	CONSUMPTION (WATT/METER)	LUMINOUS FLUX (LUMENS/METER)	EFFICIENCY (LM/W)	COLOUR TEMPERATURE	CRI	LENGTH (MM)	CUTTING (MM)	PITCH	DRAWING	EFFICIENCY ENERGY CLASS
EMPHASIZE	RB 2329 LED 300-827	2 W/m	265 Lm/m	133 Lm/W	2700 K	80	6 m	100 mm	14 mm	A	E
	RB 2329 LED 300-830	2 W/m	280 Lm/m	140 Lm/W	3000 K	80	6 m	100 mm	14 mm	A	E
	RB 2329 LED 300-840	2 W/m	295 Lm/m	148 Lm/W	4000 K	80	6 m	100 mm	14 mm	A	E
	RB 2329 LED 300-865	2 W/m	295 Lm/m	148 Lm/W	6500 K	80	6 m	100 mm	14 mm	A	E
DECORATE	RB 2329 LED 600-827	4.6 W/m	590 Lm/m	128 Lm/W	2700 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 600-830	4.6 W/m	620 Lm/m	135 Lm/W	3000 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 600-840	4.6 W/m	655 Lm/m	142 Lm/W	4000 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 600-865	4.6 W/m	655 Lm/m	142 Lm/W	6500 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 1000-827	7.6 W/m	850 Lm/m	112 Lm/W	2700 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 1000-830	7.6 W/m	900 Lm/m	118 Lm/W	3000 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 1000-840	7.6 W/m	950 Lm/m	125 Lm/W	4000 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 1000-865	7.6 W/m	950 Lm/m	125 Lm/W	6500 K	80	5 m	100 mm	14 mm	B	E
LIGHT	RB 2329 LED 1500-827	11.5 W/m	1370 Lm/m	119 Lm/W	2700 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 1500-830	11.5 W/m	1445 Lm/m	126 Lm/W	3000 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 1500-840	11.5 W/m	1520 Lm/m	132 Lm/W	4000 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 1500-865	11.5 W/m	1520 Lm/m	132 Lm/W	6500 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 2000-827	14.4 W/m	1600 Lm/m	111 Lm/W	2700 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 2000-830	14.4 W/m	1700 Lm/m	118 Lm/W	3000 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 2000-840	14.4 W/m	1800 Lm/m	125 Lm/W	4000 K	80	5 m	100 mm	14 mm	B	E
	RB 2329 LED 2000-865	14.4 W/m	1800 Lm/m	125 Lm/W	6500 K	80	5 m	100 mm	14 mm	B	E