

PR 2076 LED



Colour(s)



LED PROJECTORS

- Orientable projector LED SPOT module, maximum 4 500 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 3 SDCM
- Available in 2 700 K, 3 000 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- Luminous efficiency of system up to 138,5 lm/W
- 3-circuits track adaptor
- Head of spot made of die-cast aluminium
- Static heat sink
- Optical protection clear glass
- **Adjustable:** 90° and Turnable: 355°
- **Weight:** approx. 1,3 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** food module

Driver(s)




Standards

Class II | IP 20 | 650°

Beam(s)



Dimensions

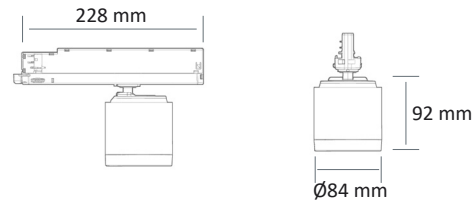

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
PR 2076 LED 3000-927	25W	28W	3000 lumens	107 lm/W	2700 K	90	E
PR 2076 LED 3000-930	25W	28W	2975 lumens	106 lm/W	3000 K	90	E
PR 2076 LED 3000-940	25W	28W	3325 lumens	118,5 lm/W	4000 K	90	E
PR 2076 LED 3500-927	31W	35W	3450 lumens	98,5 lm/W	2700 K	90	E
PR 2076 LED 3500-930	31W	35W	3450 lumens	98,5 lm/W	3000 K	90	E
PR 2076 LED 3500-940	31W	35W	3850 lumens	110 lm/W	4000 K	90	E
PR 2076 LED 3500-830	25W	28W	3700 lumens	132 lm/W	3000 K	80	D
PR 2076 LED 3500-840	25W	28W	3875 lumens	138,5 lm/W	4000 K	80	D
PR 2076 LED 4500-830	31W	35W	4275 lumens	122 lm/W	3000 K	80	D
PR 2076 LED 4500-840	31W	35W	4500 lumens	128,5 lm/W	4000 K	80	D