

PR 5140-C LED



Colour(s)

90°

355°

LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 2 774 lumens
- CRI of 95
- MacAdam Ellipse : 3 SDCM
- Available in 3 000 K et 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 113,8 lm/W
- 3-circuits track adaptor with integrated driver
- Head of spot made of die-cast aluminium
- High efficiency COB component
- Silicon lens optics
- **Weight** : Approx. 0,9 kg
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI), Casambi, Connect
- **Option(s)** : Shutter (VOL), Concealed in-rail converter (Ghost)
- Photobiological risk group 1

Driver(s)

FIXE

C
DIMM
DALI

CASAMBI

CONNECT

Standards

Class II | IP 20 | 650° | RG1

Beam(s)

7°


10°

15°

20°

35°

Dimensions

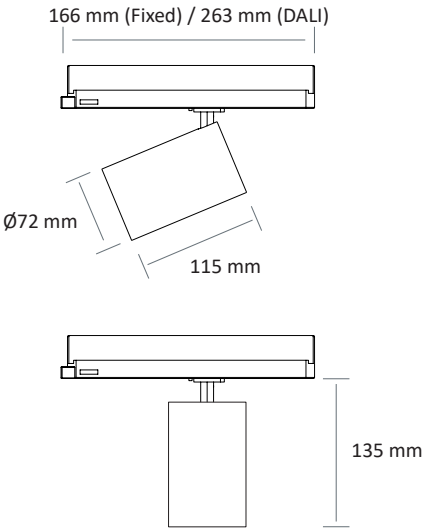

Option(s)




GHOST

PR 5140-C LED


ITEM	POWER	CONSUMPTION	LIGHT EMITTING SURFACE	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	BEAM	EFFICIENCY ENERGY CLASS
PR 5140-C LED 900-930	13,1 W	15 W	LES4	893 lumens	59,3 lm/W	3000 K	95	7°	F
PR 5140-C LED 1000-940	13,1 W	15 W	LES4	987 lumens	65,5 lm/W	4000 K	95	7°	E
PR 5140-C LED 950-930	8,8 W	11 W	LES6	965 lumens	87,7 lm/W	3000 K	95	10°/20°/35°	F
PR 5140-C LED 1050-940	8,8 W	11 W	LES6	1047 lumens	95,2 lm/W	4000 K	95	10°/20°/35°	D
PR 5140-C LED 1400-930	14,9 W	17,95 W	LES6	1381 lumens	80,6 lm/W	3000 K	95	10°/20°/35°	F
PR 5140-C LED 1500-940	14,9 W	17,95 W	LES6	1498 lumens	87,5 lm/W	4000 K	95	10°/20°/35°	D
PR 5140-C LED 2000-930	17,3 W	19,44 W	LES9	1904 lumens	98 lm/W	3000 K	95	15°/20°/35°	F
PR 5140-C LED 2000-940	17,3 W	19,44 W	LES9	2101 lumens	108 lm/W	4000 K	95	15°/20°/35°	E
PR 5140-C LED 2600-930	25 W	27,8 W	LES9	2514 lumens	87,1 lm/W	3000 K	95	15°/20°/35°	E
PR 5140-C LED 2600-940	25 W	27,8 W	LES9	2774 lumens	96,1 lm/W	4000 K	95	15°/20°/35°	E

LIGHT DISTRIBUTION


Beams 7°
LOR 81,1%
LES4

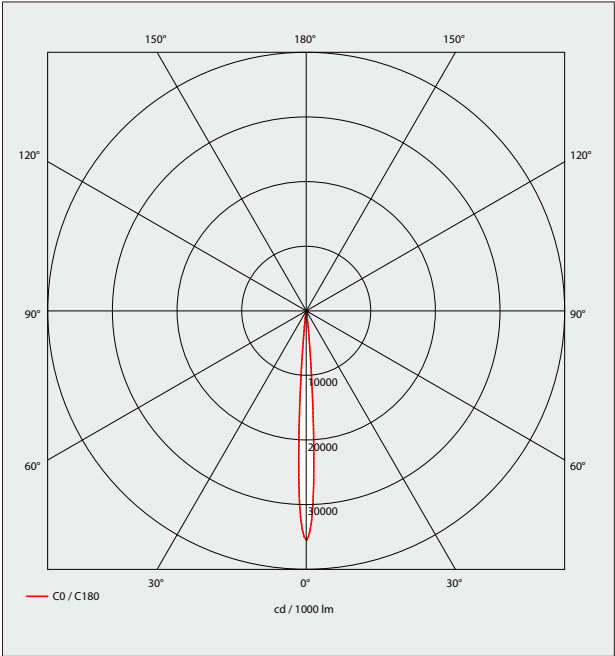


Beams 10°
LOR 78,2%
LES6

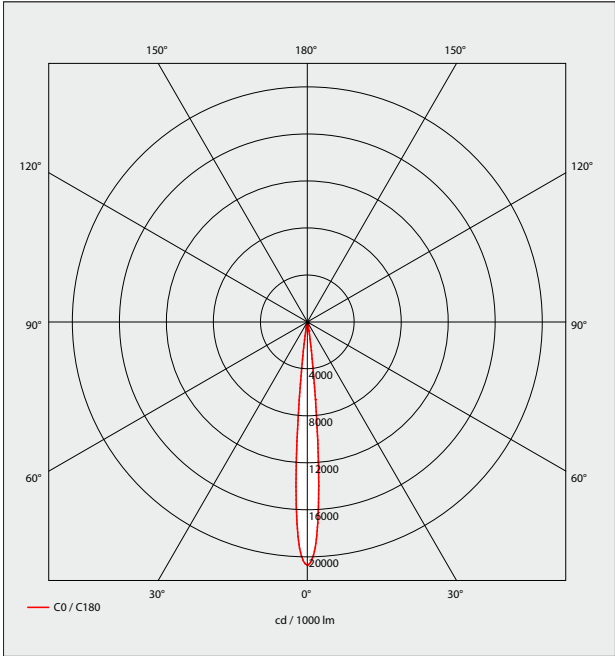

Beams 20°
LOR 79,4%
LES6

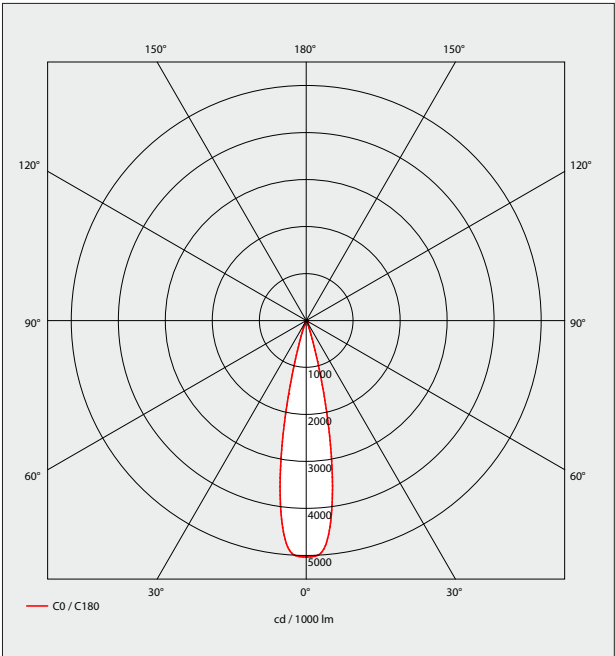


Beams 35°
LOR 68,3%
LES6

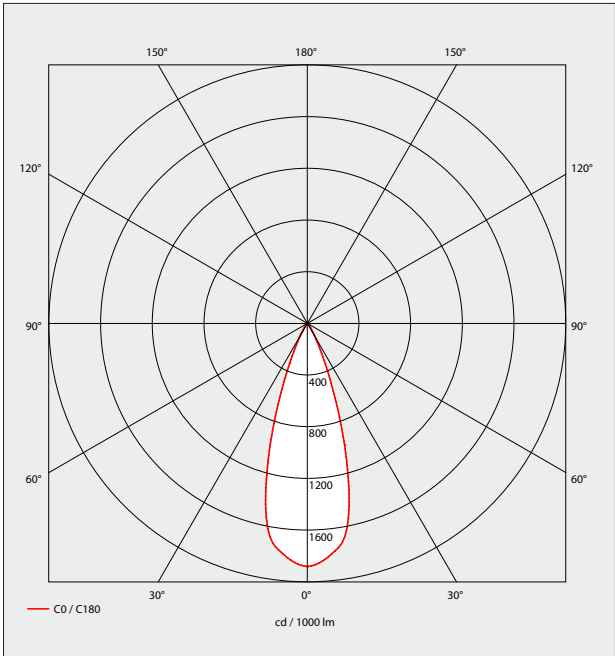


LIGHT DISTRIBUTION

Beams 15°
LOR 81,5%
LES9

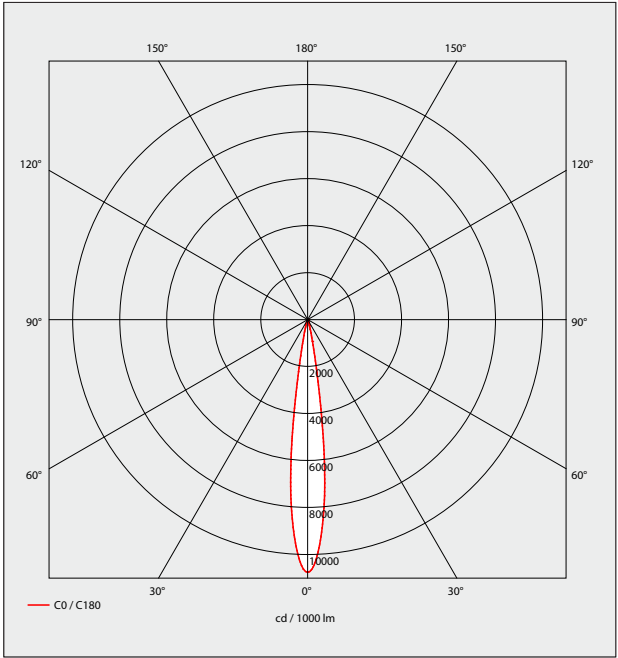

Beams 20°
LOR 81,3%
LES9

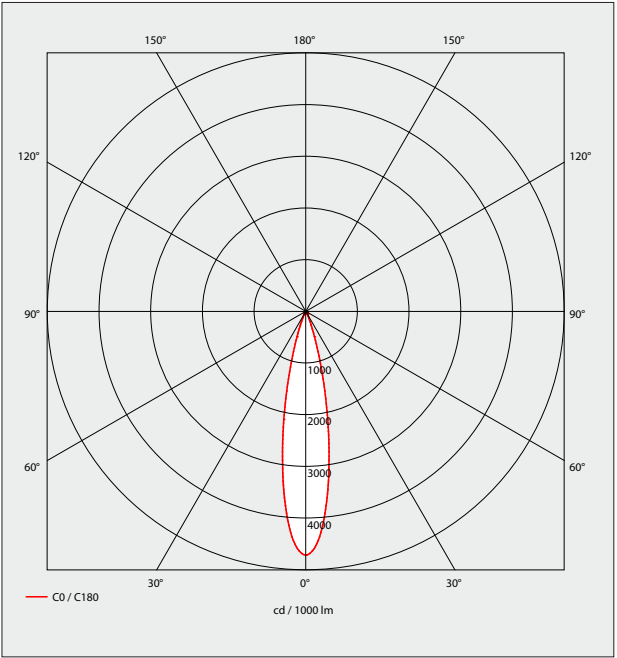

Beams 35°
LOR 74,4%
LES9

