

## AR 2473 LED



### Colour(s)



## HIGH BAY ■ LED

- Suspended mounted luminaire which can receive 3 recessed orientable spotlight, maximum 3 x 3 932 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 3 SDCM
- Available in 2 500 K, 3 000 K and 4 000 K
- 50 000 hours lamp life (L70B50)
- Luminous efficiency of system up to 145 lm/W
- Housing made of lacquered steel
- Suspension by steel wire
- **Weight:** approx. 4,7 kg
- **Number of lamp(s):** 3
- **Driver(s):** Fixe (C Fixed), Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

### Driver(s)




### Standards

Class I | IP 20 | 650°

### Beam(s)



### Dimensions

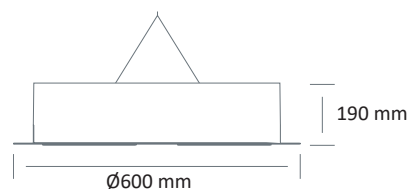

ITEM	SECTION	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
AR 2473 LED 2000-925	Bakery	23,7W	3x26,9W	3x2086 lumens	77,5 lm/W	2500 K	90	-
AR 2473 LED 2000-930	Butchery	23,7W	3x26,9W	3x2158 lumens	80,2 lm/W	3000 K	90	-
AR 2473 LED 3100-930	-	23,8W	3x27,1W	3x3129 lumens	115,5 lm/W	3000 K	90	E
AR 2473 LED 3400-940	-	23,8W	3x27,1W	3x3377 lumens	124,6 lm/W	4000 K	90	E
AR 2473 LED 3700-830	-	23,8W	3x27,1W	3x3673 lumens	135,5 lm/W	3000 K	80	D
AR 2473 LED 3900-840	-	23,8W	3x27,1W	3x3932 lumens	145 lm/W	4000 K	80	D