


SE 3951 LED


Recessed version




2000 x 45mm

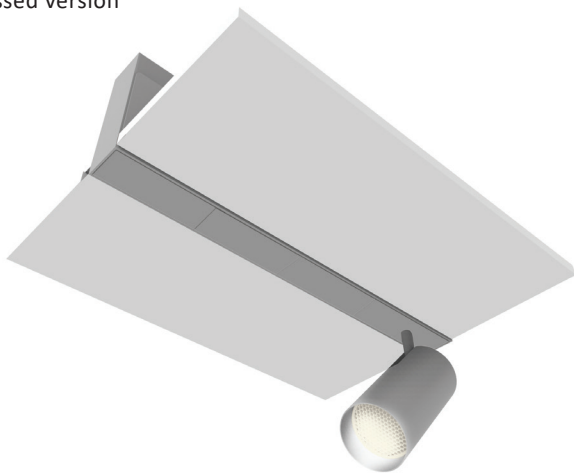

Suspended version

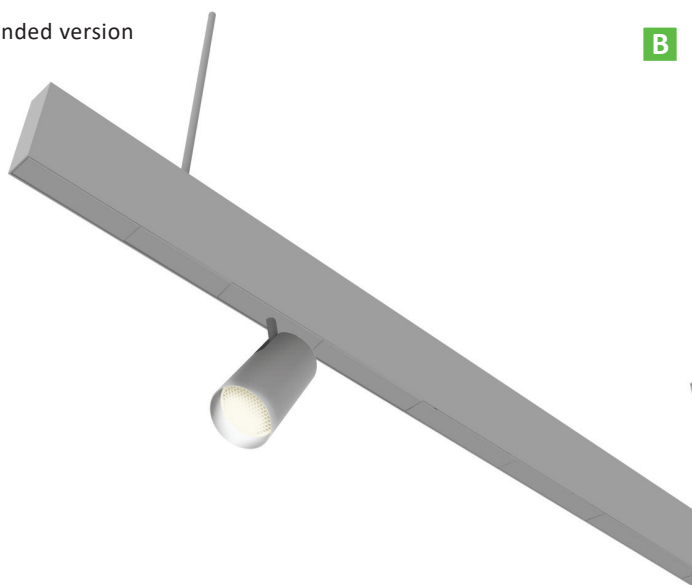

Overhanging version

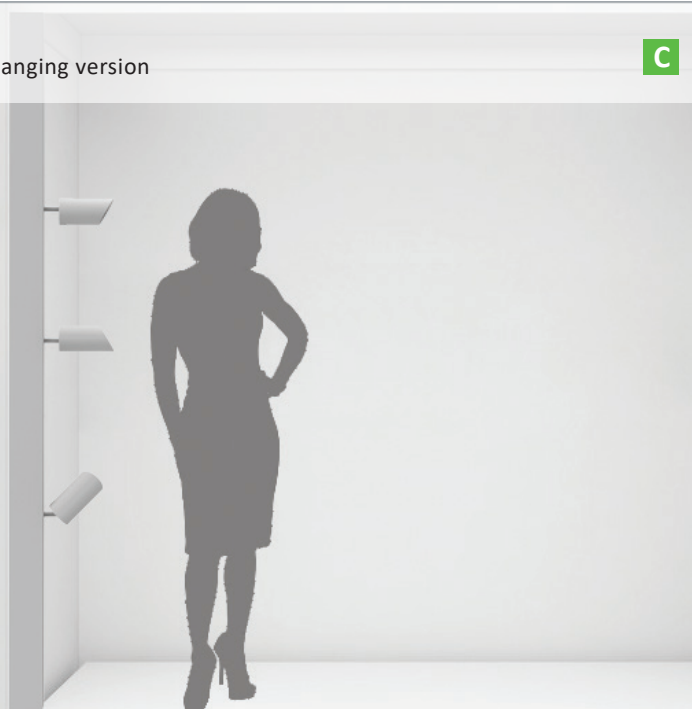

A


B

C



PROFILES ■ LED

- Lighting system in aluminum profile
- Available in recessed, suspended and overhanging version
- RAL colours on demand

Dimensions

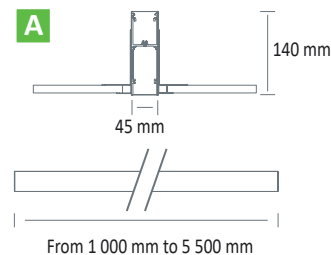

Indirect lighting tray (in option)

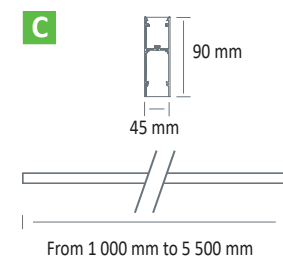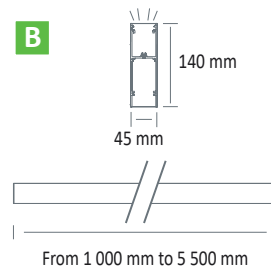

■ PR 3951 LED



- CRI of 90
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B50)
- Luminous efficiency of system up to 83 lm/W
- Static heat sink
- Silicone lens

- **Driver(s)** : Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s)** : Colour filters (FIL), Honeycomb diffuser (N.AB)

Driver(s)



Standards

Class I | IP 20 | 650°

Beam(s)



Colour(s)

