


# SE 3951 LED


Recessed version



2000 x 45mm

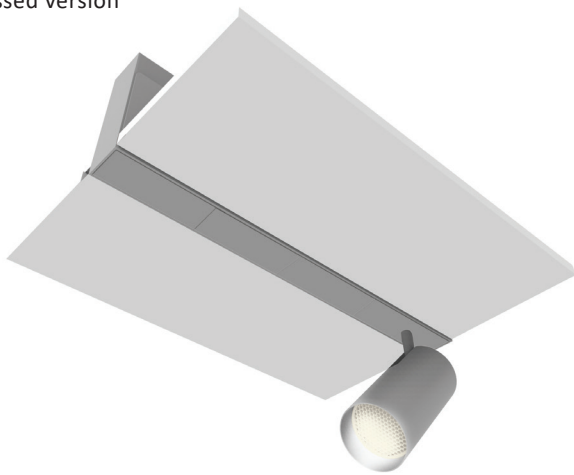

Suspended version

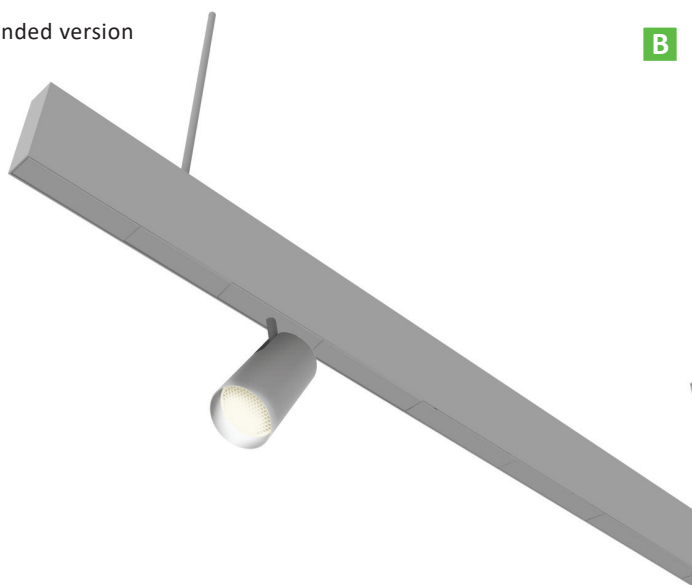

Overhanging version



A


B

C



# PROFILES ■ LED

- Lighting system in aluminum profile
- Available in recessed, suspended and overhanging version
- RAL colours on demand

## Dimensions

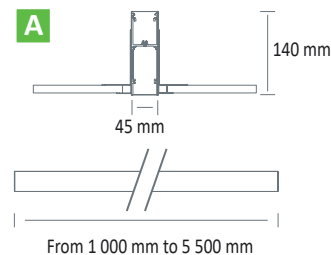

Indirect lighting tray (in option)

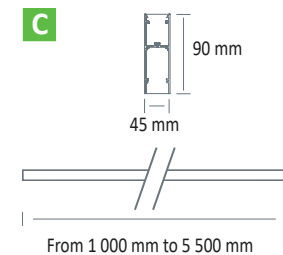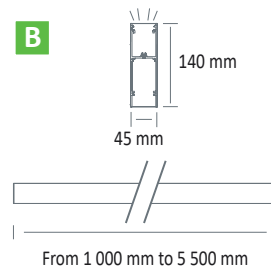

## ■ PR 3951 LED



- CRI of 90
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B50)
- Luminous efficiency of system up to 83 lm/W
- Static heat sink
- Silicone lens

- **Driver(s)** : Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s)** : Colour filters (FIL), Honeycomb diffuser (N.AB)

## Driver(s)



## Standards

Class I | IP 20 | 650°

## Efficiency energy class



## Beam(s)



## Couleur(s)

