

# ET 2658 LED

## EXTRA PROTECTED LUMINAIRES ■ LED

- Waterproof IP 65 ceiling mounted luminaire for LINEAR LED module, maximum 8 120 lumens
- CRI of 80
- Ellipse de MacAdam : 3 SDCM
- Available in 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 160,9 lm/W
- Housing made of injected polycarbonate
- Opal optical
- Clip made of stainless steel
- Static heat sink
- Fixed terminal with an installation and electrical connection (2 compression-gland)
- **Weight:** approx. 2,5 kg
- **Driver(s):** Fixed, 1-10 V Driver (1-10V), Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Electrical connection (through wiring, Lighting sensor)



### Driver(s)




### Standards

Class I | IP 65 | 850° | IK 08

### Light distribution



### Dimensions

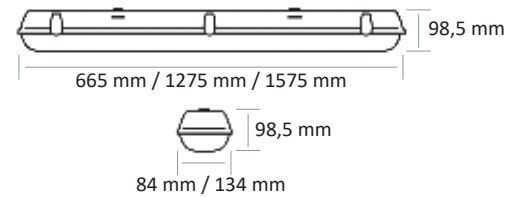

### Colour(s)



ITEM	DIMENSIONS (mm)	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
ET 2658 LED-2130-840	665x84x98,5	14W	2130 lumens	152,1 lm/W	4000 K	80	D
ET 2658 LED-4300-840	1275x84x98,5	27W	4343 lumens	160,9 lm/W	4000 K	80	D
ET 2658 LED-5800-840	1275x84x98,5	40W	5830 lumens	145,7 lm/W	4000 K	80	D
ET 2658 LED-8100-840	1575x134x98,5	55W	8120 lumens	147,6 lm/W	4000 K	80	D

### Accessories

