

LS 5017-E LED



Colour(s)



Light distribution



SYM DASY



WALL WASHERS LED

- Track suspended luminaire for LINEAR LED module(s), maximum 4 579 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B20)
- Luminous efficiency of system up to 160 lm/W
- 3 circuits track adaptor
- Housing made of prelacquered steel
- Cluster optical with lens, made of polymethyl methacrylate (PMMA)
- Static heat sink
- Optical compartment protected against shocks and dust
- **Weight:** approx. 1,4 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s) :** Double Asymétrique (DASY)


Driver(s)



Standards

Class II | IP 20 | 650° | IK 10

Dimensions

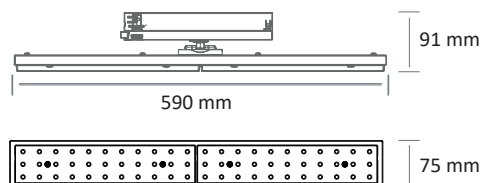


ITEM	NB OF MODULES	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 5017-E LED 3100-830	2	18,7 W	20,1 W	3057 lumens	152 lm/W	3000 K	80	D
LS 5017-E LED 3100-840	2	18,7 W	20,1 W	3218 lumens	160 lm/W	4000 K	80	D
LS 5017-E LED 4400-830	2	28,9 W	30,1 W	4348 lumens	144,5 lm/W	3000 K	80	D
LS 5017-E LED 4400-840	2	28,9 W	30,1 W	4579 lumens	152 lm/W	4000 K	80	D


TECHNICALS INFORMATION

LIGHT DISTRIBUTION


LOR 82 %
Symmetric light distribution 30°

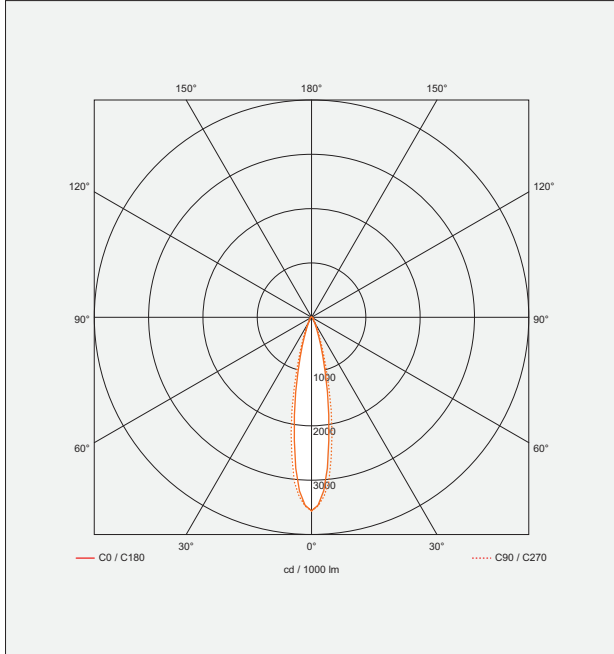


LOR 84 %
Symmetric light distribution 60° - BJB

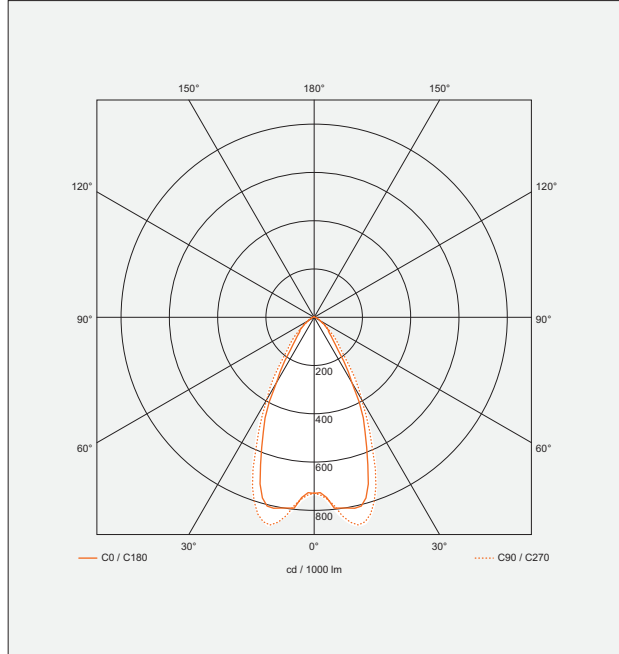

LOR 84 %
Symmetric light distribution 90° - BJB

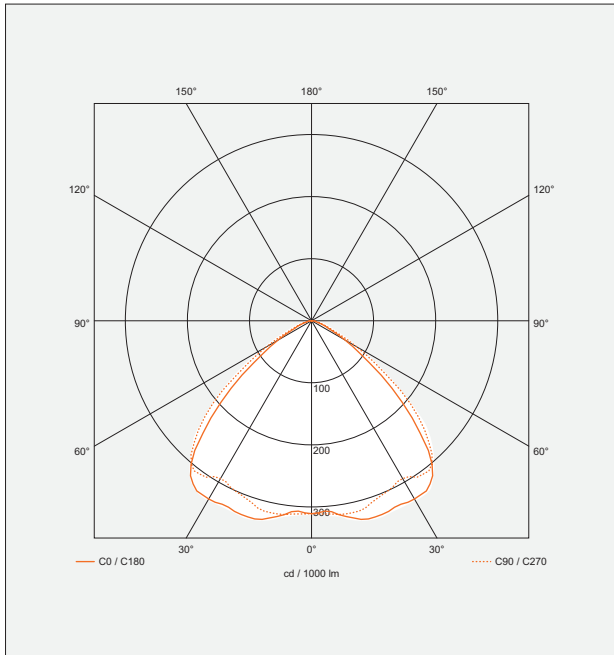


LOR 95 %
Double Asymmetric light distribution - at 40°

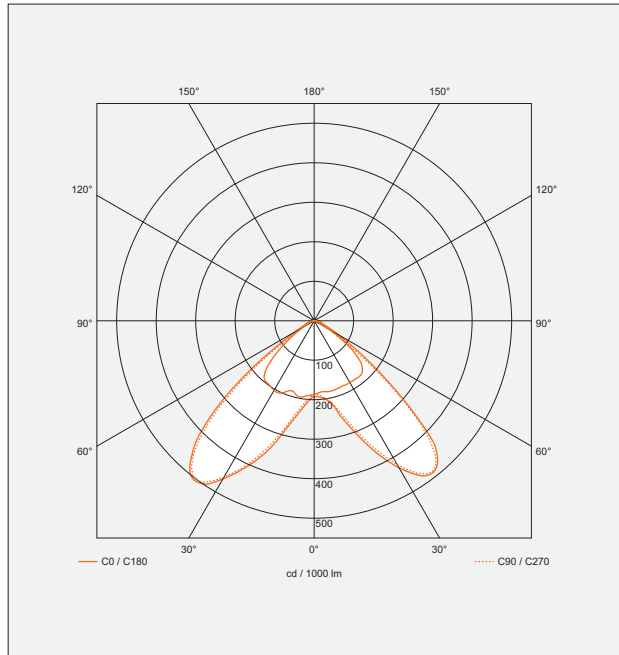


TECHNICALS INFORMATION

LIGHT DISTRIBUTION

LOR 96 %
Symmetric light distribution 60° - LEDIL

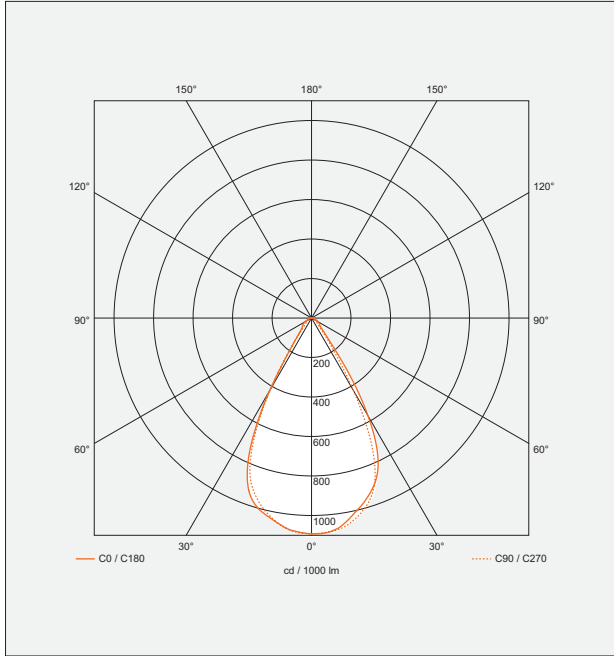

LOR 97 %
Symmetric light distribution 90° - LEDIL

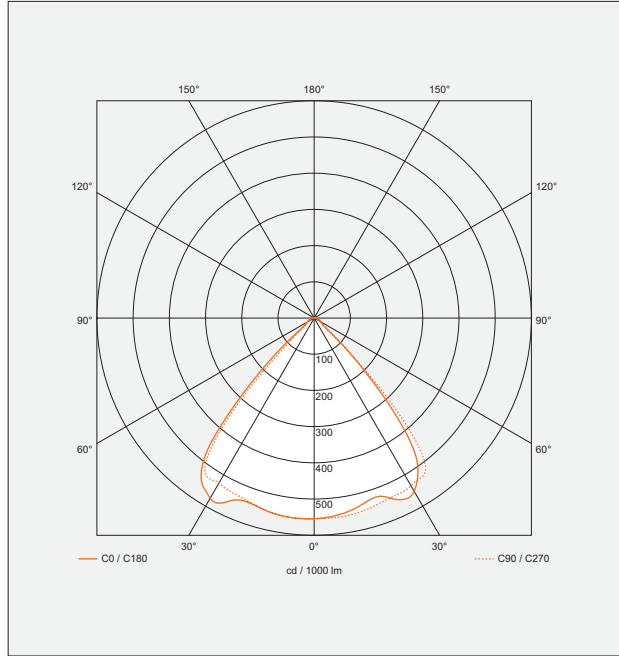

LOR 96 %
Double Asymmetric light distribution at 25°

