


AR 2268 LED



Colour(s)

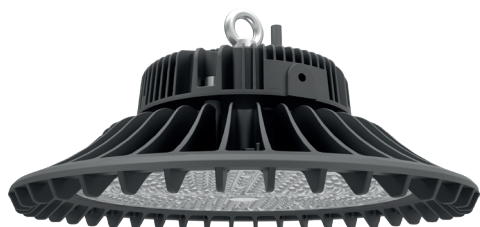

HIGH BAY ■ LED

- High bay for LED SPOT module, maximum 27 000 lumens
- CRI of 80
- MacAdam Ellipse: 4 SDCM
- Available in 3 000 K, 4 000 K, 5 700 K
- 50 000 hours lamp life (L80B50)
- Luminous efficiency of system up to 135 lm/W
- Static heat sink
- **Weight:** approx. 80W (3,7 kg), 100W (3,7 kg), 120W (4,6 kg), 150W (5,3 kg), 200W (7,2 kg)
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Minimum allowable temperature:** -20°C
- **Option(s):** Box for through wiring

Deported Driver(s)



Standards

Class I | IP 65 | 650° | IK 10

Efficiency energy class



Beam(s)



Dimensions

80W / 100W / 120W / 150W


200W




193 mm



200 mm



Ø330 mm



Ø380 mm


ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
AR 2268 LED-11000-840	80W	10800 lumens	135 lm/W	4000 K	80
AR 2268 LED-13500-840	100W	13500 lumens	135 lm/W	4000 K	80
AR 2268 LED-16000-840	120W	16200 lumens	135 lm/W	4000 K	80
AR 2268 LED-20000-840	150W	20250 lumens	135 lm/W	4000 K	80
AR 2268 LED-27000-840	200W	27000 lumens	135 lm/W	4000 K	80

■ LIGHT DISTRIBUTION

Symmetrical:
LOR: 100 %
Beam: 50°




SYM

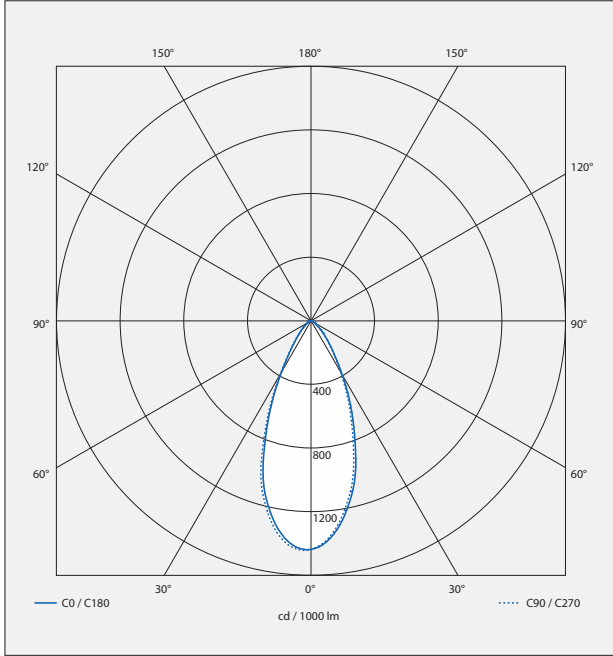

Symmetrical:
LOR: 100 %
Beam: 90°



SYM

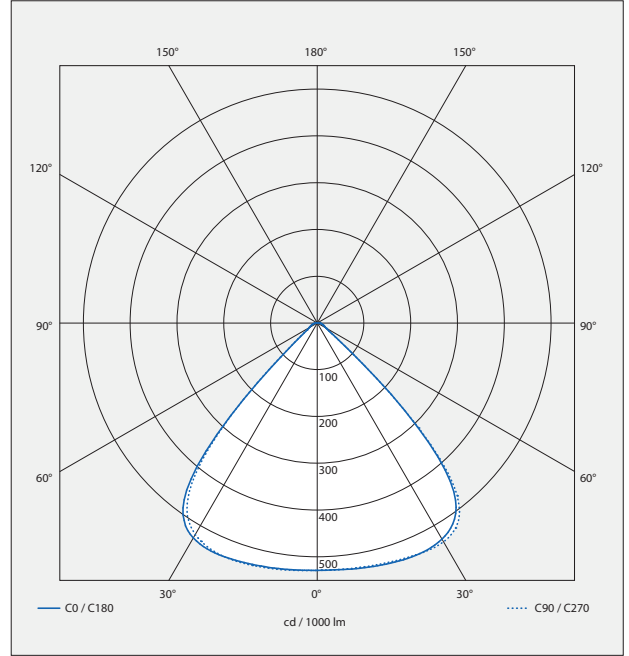

Symmetrical:
LOR: 100 %
Beam: 120°



SYM

