

## DL 3921 LED C 111



### Colour(s)



Ø140 mm



## DOWNLIGHTS ■ LED

- Recessed downlight for LED SPOT module, maximum 3 600 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 4 SDCM
- Available in 3 000 K and 4 000 K
- Up to 50 000 hours lamp life (L70B50)
- Luminous efficiency of system up to 97,5 lm/W
- Springs in pressure for easier installation
- Ring made of die-cast aluminium
- Static heat sink
- **Weight:** approx 1 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

### Driver(s)



### Standards

Class I | IP 20 | 650°


### Efficiency energy class



### Beam(s)



### Dimensions

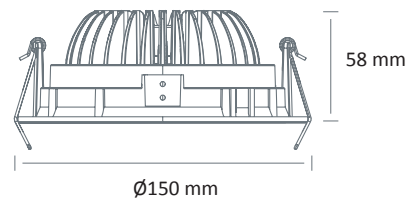

ITEM	LAMP LIFE	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
DL 3921 LED C111 1500-930	50 000 Hours	17,3W	20,4W	1500 lumens	73,5 lm/W	3000 K	90
DL 3921 LED C111 1500-940	50 000 Hours	17,3W	20,4W	1500 lumens	73,5 lm/W	4000 K	90
DL 3921 LED C111 2400-830	50 000 Hours	21,6W	25,4W	2400 lumens	94,5 lm/W	3000 K	80
DL 3921 LED C111 2400-840	50 000 Hours	21,6W	25,4W	2400 lumens	94,5 lm/W	4000 K	80
DL 3921 LED C111 3600-830	25 000 Hours	32,1W	36,9W	3600 lumens	97,5 lm/W	3000 K	80
DL 3921 LED C111 3600-840	25 000 Hours	32,1W	36,9W	3600 lumens	97,5 lm/W	4000 K	80