

ET 2189 LED



Colour(s)



Ø160 mm



EXTRA PROTECTED LUMINAIRES ■ LED

- Recessed low luminance downlight for LED module, maximum 1100 lumens
- MacAdam Ellipse: 3 SDCM
- Available in 4 000 K
- 40 000 hours lamp life (L70B50)
- Luminous efficiency of system up to 69 lm/W
- Housing made of injected polycarbonate anti-UV treatment
- Static heat sink
- **Poids:** approx. 0,7 kg
- **Driver(s):** Fixed (C Fixed)

Driver(s)



Standards

Class II | IP 20/65 (under ceiling) | 650° | IK 09


Efficiency energy class



Light distribution



Dimensions

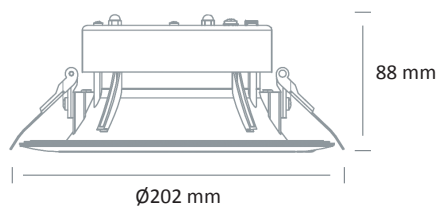

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
ET2189-LED-1100-840	16W	1100 lumens	69 lm/W	4000 K	80