


LE 2306-C LED

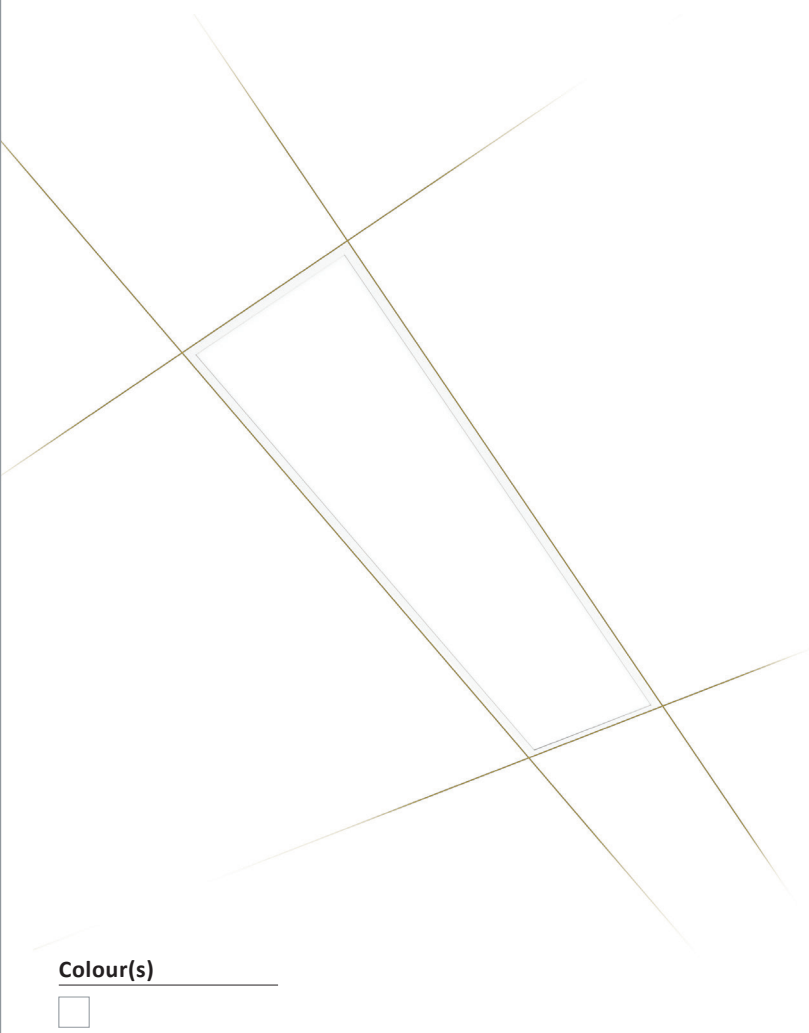

Colour(s)

RECESSED LUMINAIRES - LED

- Recessed luminaire for LINEAR LED module, maximum 4000 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B50)
- Luminous efficiency of system up to 100 lm/W
- Opal Diffuser (DO)
- Lay-in (LI)
- Housing made of painted steel
- Static heat sink
- **Weight:** approx. 4,7 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** IP 65 built-in frame, Ready-to-mount kit (security wire, protection film) (KC), Micro prismatic diffuser

Driver(s)



Standards

Class II | IP 20 | 650°

Efficiency energy class




Beam(s)



Dimensions

LO

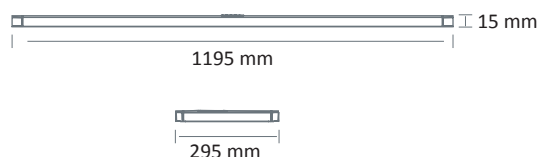

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
LE 2306-C LED-3500-830	35W	3500 lumens	100 lm/W	3000 K	80
LE 2306-C LED-3500-835	35W	3500 lumens	100 lm/W	3500 K	80
LE 2306-C LED-3500-840	35W	3500 lumens	100 lm/W	4000 K	80
LE 2306-C LED-4000-830	40W	4000 lumens	100 lm/W	3000 K	80
LE 2306-C LED-4000-835	40W	4000 lumens	100 lm/W	3500 K	80
LE 2306-C LED-4000-840	40W	4000 lumens	100 lm/W	4000 K	80

Diffusant(s)

