

## LS 2067 LED



### Colour(s)



### Light distribution



SYM DAS



## WALL WASHERS LED

- Track suspended luminaire for LINEAR LED module, maximum 3 600 lumens
- IRC of 80
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B20)
- Luminous efficiency of system up to 133,3 lm/W
- 3 circuits track adaptor
- Housing made of painted aluminium
- Static heat sink
- Optical compartment protected against shocks and dust
- **Weight:** approx. 1 kg
- **Driver(s) :** Fixed
- **Option(s) :** Opal diffuser (DO) or Transparent (DT)  
Symmetrical (SYM), Asymmetrical (DASY)


### Driver(s)



### Efficiency energy class



### Dimensions

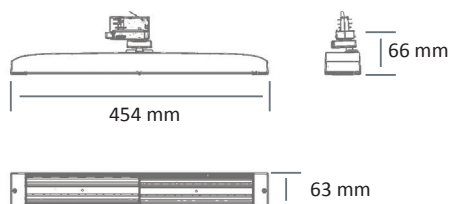

### Standards

Class I | IP 20 | 650°

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
LS 2067 LED 3500-830	23W	27W	3540 lumens	131,1 lm/W	3000 K	80
LS 2067 LED 3600-840	23W	27W	3600 lumens	133,3 lm/W	4000 K	80

### Option(s)




DO

**LIGHT DISTRIBUTION**

Symmetrical:  
LOR 95 %




SYM

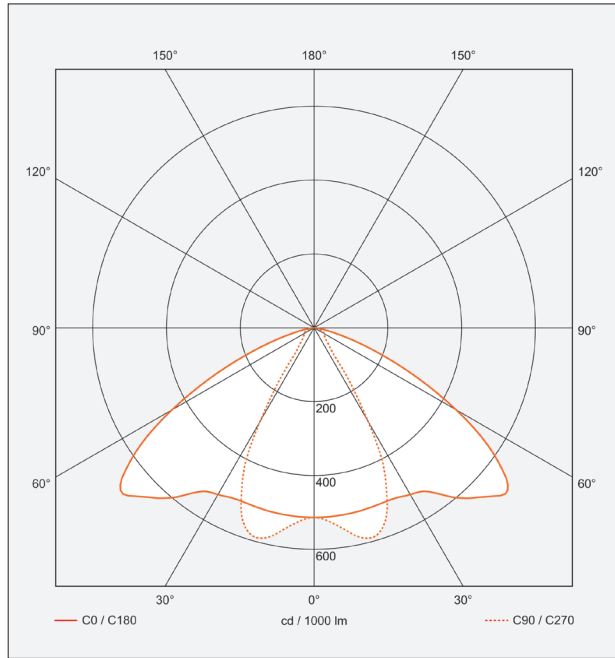

Asymmetrical:  
LOR 95 %



DASY

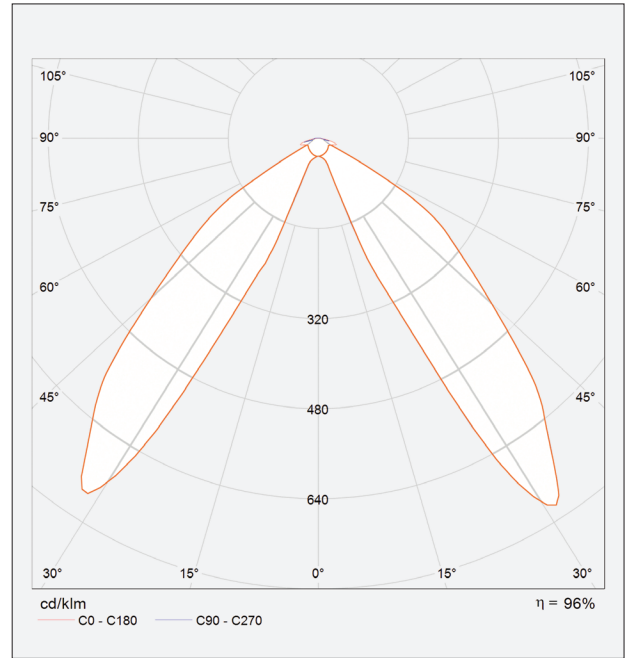

Opal Diffuser (DO)

