

LS 3934 LED ASY



Colour(s)



LED LIGHTING FIXTURES

- Track asymmetrical suspended luminaire for LINEAR LED module, maximum 2 900 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 4 000 K
- 50 000 hours lamp life (L80B20)
- Luminous efficiency of system up to 143 lm/W
- Reflector asymmetrical in Miro Silver quality
- Optical diffuser made of polymethyl methacrylate (PMMA)
- 3-circuits track adaptor
- Housing made of painted steel
- Static heat sink
- **Weight:** approx. 1 Kg
- **Standards housing length:** 295 mm
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)

Driver(s)



Standards

Class I | IP 40 | 650°


Efficiency energy class



Beam(s)



Dimensions

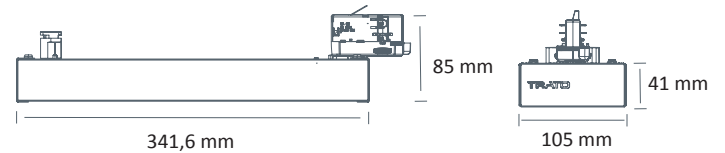

ITEM	NB OF MODULE(S)	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
LS 3934-LED ASY - 2200-830	1	16,6W	2150 lumens	129 lm/W	3000 K	80
LS 3934-LED ASY - 2200-840	1	16,6W	2240 lumens	135 lm/W	4000 K	80
LS 3934-LED ASY - 2800-830	1	20,2W	2770 lumens	137 lm/W	3000 K	80
LS 3934-LED ASY - 2800-840	1	20,2W	2900 lumens	143 lm/W	4000 K	80