

# LS 3976 ASY LED



## Colour(s)



## Light distribution



ASY

## LED LIGHTING FIXTURES

- Asymmetrical track suspended luminaire for LINEAR LED module, maximum 10 790 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K, 3 500 K, 4 000 K and 5 000 K
- 50 000 hours lamp life (L90B10)
- Luminous efficiency of system up to 158 lm/W
- 3 circuits track adaptor
- Housing made of prelacquered steel
- Cluster optical with lens, made of polycarbonate (PC) reflector made of Miro Silver available in Miro 8 (M8) or Miro 20 (M20) quality optical protector made of painted steel
- Endcaps made of injected polycarbonate
- Static heat sink
- Optical compartment protected against shocks and dust
- **Weight:** approx. 3 kg (1225 mm), 4,5 kg (1775 mm)
- **Standard length:** 1 225 or 1 775 mm
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)

## Driver(s)




## Standards

Class I | IP 20 | 650° | IK 10

## Efficiency energy class



## Dimensions

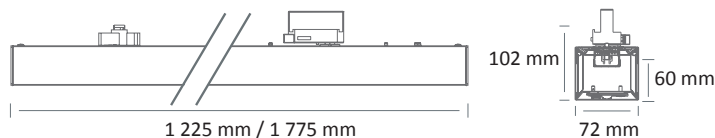

ITEM	NB OF MODULE(S)	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
LS 3976 ASY LED 4400-830	2	28,5W	4105 lumens	144 lm/W	3000 K	80
LS 3976 ASY LED 4400-840	2	28,5W	4319 lumens	151 lm/W	4000 K	80
LS 3976 ASY LED 6600-830	3	41,7W	6157 lumens	147,5 lm/W	3000 K	80
LS 3976 ASY LED 6600-840	3	41,7W	6479 lumens	155 lm/W	4000 K	80
LS 3976 ASY LED 7000-830	2	46,5W	6842 lumens	147 lm/W	3000 K	80
LS 3976 ASY LED 7000-835	2	46,5W	7054 lumens	151,5 lm/W	3500 K	80
LS 3976 ASY LED 7000-840	2	46,5W	7193 lumens	154,5 lm/W	4000 K	80
LS 3976 ASY LED 10 500-830	3	68,3W	10263 lumens	150,5 lm/W	3000 K	80
LS 3976 ASY LED 10 500-835	3	68,3W	10581 lumens	155 lm/W	3500 K	80
LS 3976 ASY LED 10 500-840	3	68,3W	10790 lumens	158 lm/W	4000 K	80