

PR 2041-B1 LED



Colour(s)



LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 4 425 lumens
- CRI of 80 or 90
- MacAdam Ellipse : 2 SDCM
- Available in 3000 K, 3500 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- Luminous efficiency of system up to 132 lm/W
- 3-circuits track adaptor
- Housing made of die-cast aluminium and box made of painted steel
- Static heat sink
- Optical protection clear glass
- **Weight:** approx. 1,4 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Colour filters (FIL)

Driver(s)



Standards

Class I | IP 20 | 650°


Efficiency energy class



Beam(s)



Dimensions

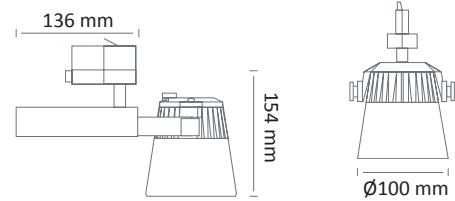

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
PR 2041-B1 LED-2700-930	23 W	27 W	2743 lumens	101,5 lm/W	3000 K	90
PR 2041-B1 LED-2700-940	21 W	25 W	2728 lumens	109 lm/W	4000 K	90
PR 2041-B1 LED-3000-830	21 W	25 W	3136 lumens	125,5 lm/W	3000 K	80
PR 2041-B1 LED-3000-840	21 W	25 W	3218 lumens	128,5 lm/W	4000 K	80
PR 2041-B1 LED-3000-930	24,6 W	28 W	2931 lumens	104,5 lm/W	3000 K	90
PR 2041-B1 LED-3000-935	24,6 W	28 W	3131 lumens	112 lm/W	3500 K	90
PR 2041-B1 LED-3000-940	24,6 W	28 W	3133 lumens	112 lm/W	4000 K	90
PR 2041-B1 LED-3500-830	24,6 W	28 W	3600 lumens	128,5 lm/W	3000 K	80
PR 2041-B1 LED-3500-840	24,6 W	28 W	3696 lumens	132 lm/W	4000 K	80
PR 2041-B1 LED-3800-830	26,6 W	30 W	3830 lumens	127,5 lm/W	3000 K	80
PR 2041-B1 LED-3800-840	26,6 W	30 W	3930 lumens	131 lm/W	4000 K	80
PR 2041-B1 LED-4000-830	28,6 W	32,5 W	4054 lumens	124,5 lm/W	3000 K	80
PR 2041-B1 LED-4000-840	28,6 W	32,5 W	4160 lumens	128 lm/W	4000 K	80
PR 2041-B1 LED-4400-830	32 W	35 W	4300 lumens	123 lm/W	3000 K	80
PR 2041-B1 LED-4400-840	32 W	35 W	4425 lumens	126,5 lm/W	4000 K	80