

## PR 2041-B2 LED



### Colour(s)



## LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 2 x 4 160 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3000 K, 3500 K and 4000 K
- 50 000 hours life expectancy (L80B10)
- 3-circuits track adaptor
- Luminous efficiency of system up to 132 lm/W
- Head of spot made of die-cast aluminium and box made of painted steel
- Static heat sink
- Optical protection clear glass
- **Weight:** approx. 1,9 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Colour filters (FIL)

### Driver(s)



### Standards

Class I | IP 20 | 650°


### Efficiency energy class



### Beam(s)



### Dimensions

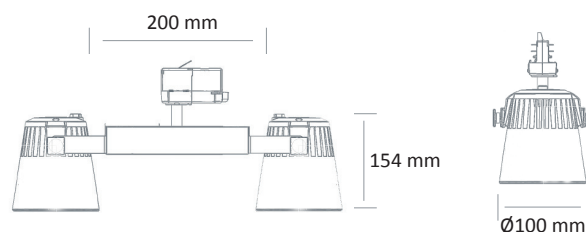

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	EFFICIENCY OF SYSTEM	COLOUR TEMPERATURE	CRI
PR 2041-B2 LED-2700-930	2x23 W	2x27 W	2x2743 lumens	101,5 lm/W	3000 K	90
PR 2041-B2 LED-2700-940	2x21 W	2x25 W	2x2728 lumens	109 lm/W	4000 K	90
PR 2041-B2 LED-3000-830	2x21 W	2x25 W	2x3136 lumens	125,5 lm/W	3000 K	80
PR 2041-B2 LED-3000-840	2x21 W	2x25 W	2x3218 lumens	128,5 lm/W	4000 K	80
PR 2041-B2 LED-3000-930	2x24,6 W	2x28 W	2x2931 lumens	104,5 lm/W	3000 K	90
PR 2041-B2 LED-3000-935	2x24,6 W	2x28 W	2x3131 lumens	112 lm/W	3500 K	90
PR 2041-B2 LED-3000-940	2x24,6 W	2x28 W	2x3133 lumens	112 lm/W	4000 K	90
PR 2041-B2 LED-3500-830	2x24,6 W	2x28 W	2x3600 lumens	128,5 lm/W	3000 K	80
PR 2041-B2 LED-3500-840	2x24,6 W	2x28 W	2x3696 lumens	132 lm/W	4000 K	80
PR 2041-B2 LED-3800-830	2x26,6 W	2x30 W	2x3830 lumens	127,5 lm/W	3000 K	80
PR 2041-B2 LED-3800-840	2x26,6 W	2x30 W	2x3930 lumens	131 lm/W	4000 K	80
PR 2041-B2 LED-4000-830	2x28,6 W	2x32,5 W	2x4054 lumens	124,5 lm/W	3000 K	80
PR 2041-B2 LED-4000-840	2x28,6 W	2x32,5 W	2x4160 lumens	128 lm/W	4000 K	80