

- Orientable projector for LED SPOT module, maximum 7 487 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K or 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 136 lm/W
- 3-circuits track adaptor
- Head of spot made of die-cast plastic
- Static heat sink
- Optical protection clear glass
- **Weight:** approx. 0,9 kg
- **Driver(s) :** Fixed
- **Option(s) :** Colour filters (FIL)



Driver(s)



Standards

Class I | IP 20 | 650°


Efficiency energy class



Beam(s)



Dimensions

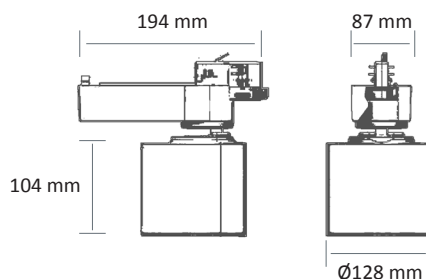

Colour(s)



ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	BEAM(S)
PR 2081-C LED 3000-930	23,5W	27,5W	3123 lumens	113,5 lm/W	3000 K	90	A
PR 2081-C LED 3000-940	21,5W	25,5W	3131 lumens	123 lm/W	4000 K	90	A
PR 2081-C LED 3500-830	24,6W	28W	3600 lumens	128,5 lm/W	3000 K	80	B
PR 2081-C LED 3500-840	24,6W	28W	3696 lumens	132 lm/W	4000 K	80	B
PR 2081-C LED 4000-830	28,6W	32,5W	4054 lumens	124,5 lm/W	3000 K	80	B
PR 2081-C LED 4000-840	28,6W	32,5W	4160 lumens	128 lm/W	4000 K	80	B
PR 2081-C LED 4000-930	30,5W	34W	3974 lumens	117 lm/W	3000 K	90	A
PR 2081-C LED 4000-940	30,5W	34W	4246 lumens	125 lm/W	4000 K	90	A
PR 2081-C LED 5000-830	38,7W	43W	5129 lumens	119 lm/W	3000 K	80	B
PR 2081-C LED 5000-840	38,7W	43W	5262 lumens	122,5 lm/W	4000 K	80	B
PR 2081-C LED 7000-830	49,2W	55W	7298 lumens	132,5 lm/W	3000 K	80	A
PR 2081-C LED 7000-840	49,2W	55W	7487 lumens	136 lm/W	4000 K	80	A