

PR 5060 LED

LED PROJECTORS

- Orientable projector for LED SPOT module, maximum 1124 lumens
- CRI of 90
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K
- 50 000 hours lamp life (L80B50)
- Luminous efficiency of system up to 76,5 lm/W
- 3-circuits track adaptor
- Housing made of painted powdered aluminium
- Static heat sink
- Optical silicone lens
- **Weight:** approx. 1,3 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)



Driver(s)



Standards

Classe II | IP 20 | 650°


Efficiency energy class



Beam(s)




Dimensions

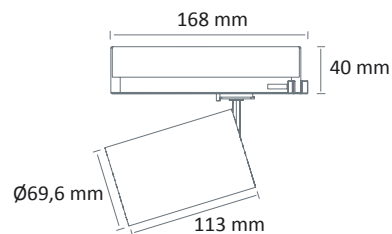

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
PR 5060 LED 900-930	9,2W	11,5W	880 lumens	76,5 lm/W	3000 K	90
PR 5060 LED 1000-930	11W	13,7W	1005 lumens	73,5 lm/W	3000 K	90
PR 5060 LED 1100-930	12,7W	15,8W	1124 lumens	71 lm/W	3000 K	90

Adjustable beam

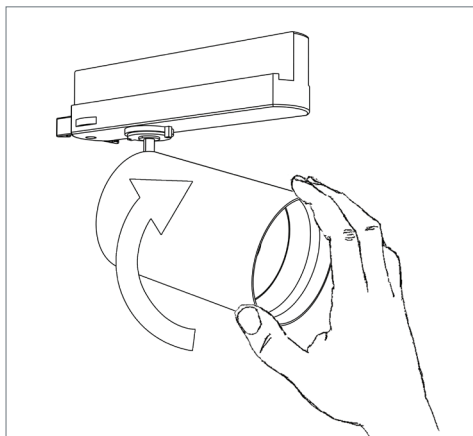

Adjustable beam by an housing rotation