

EO 2178 LED



Colour(s)



Ø120 mm



ORIENTABLE AND ADJUSTABLE . LED

- Circular recessed orientable spotlight for LED SPOT module, maximum 4 525 lumens
- CRI of 80 or 90
- MacAdam Ellipse : 2 SDCM
- Available in 2 700 K, 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 150 lm/W
- Springs in pressure for easier installation
- Static heat sink
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDA LI)

Driver(s)




Standards

Class II | IP 20 | 650°

Beam(s)



Dimensions

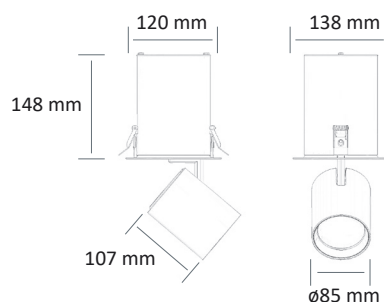

| ITEM | POWER | CONSUMPTION | LUMINOUS FLUX | SYSTEM EFFICIENCY | COLOUR TEMPERATURE | CRI | EFFICIENCY ENERGY CLASS |
|----------------------|-------|-------------|---------------|-------------------|--------------------|-----|-------------------------|
| EO 2178 LED 2000-927 | 15W | 17W | 1950 lumens | 114,7 lm/W | 2700 K | 90 | E |
| EO 2178 LED 2000-930 | 15W | 17W | 2025 lumens | 119,1 lm/W | 3000 K | 90 | E |
| EO 2178 LED 2000-935 | 15W | 17W | 2050 lumens | 120,6 lm/W | 3500 K | 90 | E |
| EO 2178 LED 2000-940 | 15W | 17W | 2150 lumens | 126,5 lm/W | 4000 K | 90 | E |
| EO 2178 LED 2500-830 | 15W | 17W | 2475 lumens | 145,6 lm/W | 3000 K | 80 | D |
| EO 2178 LED 2500-840 | 15W | 17W | 2550 lumens | 150 lm/W | 4000 K | 80 | D |
| EO 2178 LED 3500-927 | 32W | 35W | 3450 lumens | 98,6 lm/W | 2700 K | 90 | E |
| EO 2178 LED 3500-930 | 32W | 35W | 3600 lumens | 102,9 lm/W | 3000 K | 90 | E |
| EO 2178 LED 3500-935 | 32W | 35W | 3650 lumens | 104,3 lm/W | 3500 K | 90 | E |
| EO 2178 LED 3500-940 | 32W | 35W | 3850 lumens | 110 lm/W | 4000 K | 90 | E |
| EO 2178 LED 4500-830 | 32W | 35W | 4425 lumens | 126,4 lm/W | 3000 K | 80 | D |
| EO 2178 LED 4500-840 | 32W | 35W | 4525 lumens | 129,3 lm/W | 4000 K | 80 | D |