

EO 2241-A LED



Colour(s)



Ø180 mm



ORIENTABLE AND ADJUSTABLE - LED

- Circular recessed orientable spotlight for LED SPOT module, maximum 7 700 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 151,2 lm/W
- Springs in pressure for easier installation
- Ring made of die-cast aluminium
- Static heat sink
- **Weight:** Approx. 1,8 kg
- **Driver(s):** Fixe (C Fixed), Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions

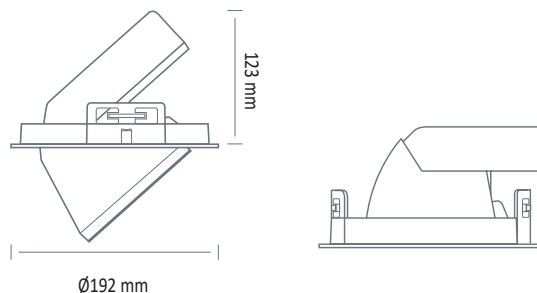

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	BEAM	EFFICIENCY ENERGY CLASS
EO 2241-A LED-2000-930	14W	1918 lumens	137,9 lm/W	3000 K	90	B	D
EO 2241-A LED-2000-940	14W	2016 lumens	145 lm/W	4000 K	90	B	D
EO 2241-A LED 3000-830	21W	3025 lumens	144 lm/W	3000 K	80	B	D
EO 2241-A LED 3000-840	21W	3175 lumens	151,2 lm/W	4000 K	80	B	D
EO 2241-A LED 3500-930	25,4W	3434 lumens	135,2 lm/W	3000 K	90	B	D
EO 2241-A LED 3500-940	25,4W	3629 lumens	142,9 lm/W	4000 K	90	B	D
EO 2241-A LED 4000-930	31,7 W	4143 lumens	130,4 lm/W	3000 K	90	B	D
EO 2241-A LED 4000-940	29,4 W	4139 lumens	140,6 lm/W	4000 K	90	B	D
EO 2241-A LED 4500-830	34W	4275 lumens	125,7 lm/W	3000 K	80	B	D
EO 2241-A LED 4500-840	34W	4500 lumens	132,3 lm/W	4000 K	80	B	D
EO 2241-A LED 5000-830	43W	5075 lumens	118 lm/W	3000 K	80	B	D
EO 2241-A LED 5000-840	43W	5350 lumens	124,4 lm/W	4000 K	80	B	D
EO 2241-A LED 5500-930	41,8W	5262 lumens	125,9 lm/W	3000 K	90	B	D
EO 2241-A LED 5500-940	41,8W	5592 lumens	133,8 lm/W	4000 K	90	B	D
EO 2241-A LED 7500-830	55W	7325 lumens	133 lm/W	3000 K	80	A	D
EO 2241-A LED 7500-840	55W	7700 lumens	140 lm/W	4000 K	80	A	D