




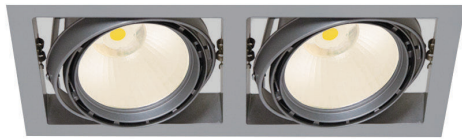


EO 2243-1 LED

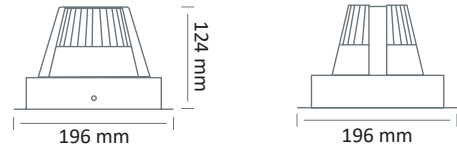

EO 2243-2 LED

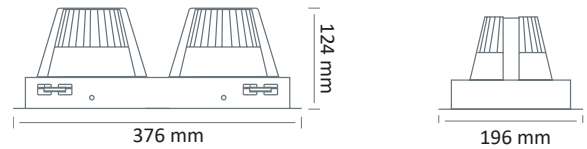

EO 2243-3 LED

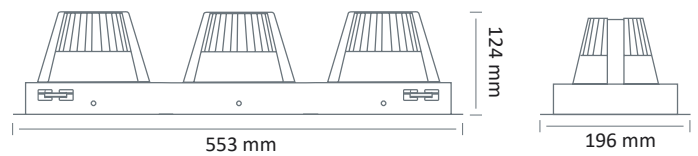

Colour(s)



ORIENTABLE AND ADJUSTABLE ■ LED

- Recessed orientable spotlight, simple, double or triple gimbal modules, for LED SPOT module, maximum 3 x 7 750 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 151,2 lm/W
- Springs in pressure for easier installation
- Housing and ring made of die-cast aluminium
- Static heat sink
- **Weight:** approx. 1,7 kg (simple), 3,1 kg (double), 4,5 kg (triple)
- **Driver(s):** Fixe (C Fixed), Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

Driver(s)



Standards

Classe II | IP 20 | 650°

Beam(s)



| ITEM | CONSUMPTION | LUMINOUS FLUX | SYSTEM EFFICIENCY | COLOUR TEMPERATURE | CRI | BEAM | EFFICIENCY ENERGY CLASS |
|------------------------|-------------|---------------|-------------------|--------------------|-----|------|-------------------------|
| EO 2243-1 LED 2000-930 | 14W | 1918 lumens | 137,9 lm/W | 3000 K | 90 | B | D |
| EO 2243-1 LED 2000-940 | 14W | 2016 lumens | 145 lm/W | 4000 K | 90 | B | D |
| EO 2243-1 LED 3000-830 | 21W | 3025 lumens | 144 lm/W | 3000 K | 80 | B | D |
| EO 2243-1 LED 3000-840 | 21W | 3175 lumens | 151,2 lm/W | 4000 K | 80 | B | D |
| EO 2243-1 LED 3500-930 | 25,4W | 3434 lumens | 135,2 lm/W | 3000 K | 90 | B | D |
| EO 2243-1 LED 3500-940 | 25,4W | 3629 lumens | 142,9 lm/W | 4000 K | 90 | B | D |
| EO 2243-1 LED 4000-930 | 31,7W | 4143 lumens | 130,4 lm/W | 3000 K | 90 | B | D |
| EO 2243-1 LED 4000-940 | 29,4W | 4139 lumens | 140,6 lm/W | 4000 K | 90 | B | D |
| EO 2243-1 LED 4500-830 | 34W | 4275 lumens | 125,7 lm/W | 3000 K | 80 | B | D |
| EO 2243-1 LED 4500-840 | 34W | 4500 lumens | 132,3 lm/W | 4000 K | 80 | B | D |
| EO 2243-1 LED 5000-830 | 43W | 5075 lumens | 118 lm/W | 3000 K | 80 | B | D |
| EO 2243-1 LED 5000-840 | 43W | 5350 lumens | 124,4 lm/W | 4000 K | 80 | B | D |
| EO 2243-1 LED 5500-930 | 41,8W | 5262 lumens | 125,9 lm/W | 3000 K | 90 | B | D |
| EO 2243-1 LED 5500-940 | 41,8W | 5592 lumens | 133,8 lm/W | 4000 K | 90 | B | D |
| EO 2243-1 LED 7500-830 | 55W | 7325 lumens | 133 lm/W | 3000 K | 80 | A | D |
| EO 2243-1 LED 7500-840 | 55W | 7750 lumens | 140 lm/W | 4000 K | 80 | A | D |
| EO 2243-2 LED 2000-930 | 2x14W | 2x1918 lumens | 137,9 lm/W | 3000 K | 90 | B | D |
| EO 2243-2 LED 2000-940 | 2x14W | 2x2016 lumens | 145 lm/W | 4000 K | 90 | B | D |
| EO 2243-2 LED 3000-830 | 2x21W | 2x3025 lumens | 144 lm/W | 3000 K | 80 | B | D |
| EO 2243-2 LED 3000-840 | 2x21W | 2x3175 lumens | 151,2 lm/W | 4000 K | 80 | B | D |
| EO 2243-2 LED 3500-930 | 2x25,4W | 2x3434 lumens | 135,2 lm/W | 3000 K | 90 | B | D |
| EO 2243-2 LED 3500-940 | 2x25,4W | 2x3629 lumens | 142,9 lm/W | 4000 K | 90 | B | D |
| EO 2243-2 LED 4000-930 | 2x31,7W | 2x4143 lumens | 130,4 lm/W | 3000 K | 90 | B | D |
| EO 2243-2 LED 4000-940 | 2x29,4W | 2x4139 lumens | 140,6 lm/W | 4000 K | 90 | B | D |
| EO 2243-2 LED 4500-830 | 2x34W | 2x4275 lumens | 125,7 lm/W | 3000 K | 80 | B | D |
| EO 2243-2 LED 4500-840 | 2x34W | 2x4500 lumens | 132,3 lm/W | 4000 K | 80 | B | D |
| EO 2243-2 LED 5000-830 | 2x43W | 2x5075 lumens | 118 lm/W | 3000 K | 80 | B | D |
| EO 2243-2 LED 5000-840 | 2x43W | 2x5350 lumens | 124,4 lm/W | 4000 K | 80 | B | D |
| EO 2243-2 LED 5500-930 | 2x41,8W | 2x5262 lumens | 125,9 lm/W | 3000 K | 90 | B | D |
| EO 2243-2 LED 5500-940 | 2x41,8W | 2x5592 lumens | 133,8 lm/W | 4000 K | 90 | B | D |
| EO 2243-2 LED 7500-830 | 2x55W | 2x7325 lumens | 133 lm/W | 3000 K | 80 | A | D |
| EO 2243-2 LED 7500-840 | 2x55W | 2x7750 lumens | 140 lm/W | 4000 K | 80 | A | D |

EO 2243 LED

| ITEM | CONSUMMATION | LUMINOUS FLUX | SYSTEM EFFICIENCY | COLOUR TEMPERATURE | CRI | BEAM | EFFICIENCY ENERGY CLASS |
|------------------------|--------------|---------------|-------------------|--------------------|-----|------|-------------------------|
| EO 2243-3 LED 2000-930 | 3x14W | 3x1918 lumens | 137,9 lm/W | 3000 K | 90 | B | D |
| EO 2243-3 LED 2000-940 | 3x14W | 3x2016 lumens | 145 lm/W | 4000 K | 90 | B | D |
| EO 2243-3 LED 3000-830 | 3x21W | 3x3025 lumens | 144 lm/W | 3000 K | 80 | B | D |
| EO 2243-3 LED 3000-840 | 3x21W | 3x3175 lumens | 151,2 lm/W | 4000 K | 80 | B | D |
| EO 2243-3 LED 3500-930 | 3x25,4W | 2x3434 lumens | 135,2 lm/W | 3000 K | 90 | B | D |
| EO 2243-3 LED 3500-940 | 3x25,4W | 2x3629 lumens | 142,9 lm/W | 4000 K | 90 | B | D |
| EO 2243-2 LED 4000-930 | 3x31,7W | 2x4143 lumens | 130,4 lm/W | 3000 K | 90 | B | D |
| EO 2243-2 LED 4000-940 | 3x29,4W | 2x4139 lumens | 140,6 lm/W | 4000 K | 90 | B | D |
| EO 2243-3 LED 4500-830 | 3x34W | 3x4275 lumens | 125,7 lm/W | 3000 K | 80 | B | D |
| EO 2243-3 LED 4500-840 | 3x34W | 3x4500 lumens | 132,3 lm/W | 4000 K | 80 | B | D |
| EO 2243-3 LED 5000-830 | 3x43W | 3x5075 lumens | 118 lm/W | 3000 K | 80 | B | D |
| EO 2243-3 LED 5000-840 | 3x43W | 3x5350 lumens | 124,4 lm/W | 4000 K | 80 | B | D |
| EO 2243-3 LED 5500-930 | 3x41,8W | 2x5262 lumens | 125,9 lm/W | 3000 K | 90 | B | D |
| EO 2243-3 LED 5500-940 | 2x41,8W | 2x5592 lumens | 133,8 lm/W | 4000 K | 90 | B | D |
| EO 2243-3 LED 7500-830 | 3x55W | 3x7325 lumens | 133 lm/W | 3000 K | 80 | A | D |
| EO 2243-3 LED 7500-840 | 3x55W | 3x7750 lumens | 140 lm/W | 4000 K | 80 | A | D |