







EO 2245-1 LED



116 x 116 mm





EO 2245-2 LED



116 x 240 mm



EO 2245-3 LED

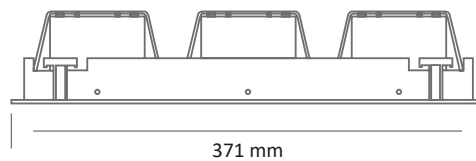

116 x 360 mm



**Colour(s)**



# EO 2245 LED

- Recessed orientable spotlight, simple, double or triple gimbal modules, for LED SPOT module, maximum 3 x 4 050 lumens
- CRI of 80 or 90
- MacAdam Ellipse: 2 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 163,6 lm/W
- Springs in pressure for easier installation
- Static heat sink
- **Weight:** approx. 1 kg (simple), 2 kg (double), 3 kg (triple)
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

## Driver(s)



## Standards

Class II | IP 20 | 650°

## Beam(s)



ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
EO 2245-1 LED-1800-830	11W	1725 lumens	156,8 lm/W	3000 K	80	D
EO 2245-1 LED-1800-840	11W	1800 lumens	163,6 lm/W	4000 K	80	D
EO 2245-1 LED 2000-930	14W	1918 lumens	137,9 lm/W	3000 K	90	D
EO 2245-1 LED 2000-940	14W	2016 lumens	145 lm/W	4000 K	90	D
EO 2245-1 LED-2500-830	17W	2475 lumens	145,5 lm/W	3000 K	80	D
EO 2245-1 LED-2500-840	17W	2600 lumens	152,9 lm/W	4000 K	80	D
EO 2245-1 LED 3500-930	25,4W	3434 lumens	135,2 lm/W	3000 K	90	D
EO 2245-1 LED 3500-940	25,4W	3629 lumens	142,9 lm/W	4000 K	90	D
EO 2245-1 LED-4000-830	30W	3850 lumens	128,3 lm/W	3000 K	80	D
EO 2245-1 LED-4000-840	30W	4050 lumens	135 lm/W	4000 K	80	D
EO 2245-2 LED-1800-830	2x11W	2x1725 lumens	156,8 lm/W	3000 K	80	D
EO 2245-2 LED-1800-840	2x11W	2x1800 lumens	163,6 lm/W	4000 K	80	D
EO 2245-2 LED 2000-930	2x14W	2x1918 lumens	137,9 lm/W	3000 K	90	D
EO 2245-2 LED 2000-940	2x14W	2x2016 lumens	145 lm/W	4000 K	90	D
EO 2245-2 LED-2500-830	2x17W	2x2475 lumens	145,5 lm/W	3000 K	80	D
EO 2245-2 LED-2500-840	2x17W	2x2600 lumens	152,9 lm/W	4000 K	80	D
EO 2245-2 LED 3500-930	2x25,4W	2x3434 lumens	135,2 lm/W	3000 K	90	D
EO 2245-2 LED 3500-940	2x25,4W	2x3629 lumens	142,9 lm/W	4000 K	90	D
EO 2245-2 LED-4000-830	2x30W	2x3850 lumens	128,3 lm/W	3000 K	80	D
EO 2245-2 LED-4000-840	2x30W	2x4050 lumens	135 lm/W	4000 K	80	D
EO 2245-3 LED-1800-830	3x11W	3x1725 lumens	156,8 lm/W	3000 K	80	D
EO 2245-3 LED-1800-840	3x11W	3x1800 lumens	163,6 lm/W	4000 K	80	D
EO 2245-3 LED 2000-930	3x14W	3x1918 lumens	137,9 lm/W	3000 K	90	D
EO 2245-3 LED 2000-940	3x14W	3x2016 lumens	145 lm/W	4000 K	90	D
EO 2245-3 LED-2500-830	3x17W	3x2475 lumens	145,5 lm/W	3000 K	80	D
EO 2245-3 LED-2500-840	3x17W	3x2600 lumens	152,9 lm/W	4000 K	80	D
EO 2245-3 LED 3500-930	3x25,4W	3x3434 lumens	135,2 lm/W	3000 K	90	D
EO 2245-3 LED 3500-940	3x25,4W	3x3629 lumens	142,9 lm/W	4000 K	90	D
EO 2245-3 LED-4000-830	3x30W	3x3850 lumens	128,3 lm/W	3000 K	80	D
EO 2245-3 LED-4000-840	3x30W	3x4050 lumens	135 lm/W	4000 K	80	D