

EO 2249 LED

ORIENTABLE AND ADJUSTABLE ■ LED

- Circular recessed orientable spotlight for LED SPOT module, maximum 1667 lumens
- CRI de 80
- Available in 3 000 K, 3 500 K et 4 000 K
- 50 000 hours lamp life (L80B50)
- Luminous efficiency of system up to 128,2 lm/W
- Housing made of die-cast aluminium
- Static heat sink
- **Adjustable** : 30° and Turnable : 350°
- **Driver(s)** : Fixed
- **Option(s)** : Fast connector (CORD)



Colour(s)



Ø68 mm



Driver(s)




Standards

Class II | IP 44 | 650°

Beam(s)




Dimensions




ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
EO 2249 LED 1600-830	13W	1624 lumens	124,9 lm/W	3000 K	80	E
EO 2249 LED 1600-835	13W	1654 lumens	127,2 lm/W	3500 K	80	E
EO 2249 LED 1600-840	13W	1667 lumens	128,2 lm/W	4000 K	80	E

LIGHT DISTRIBUTION

Beams 15°

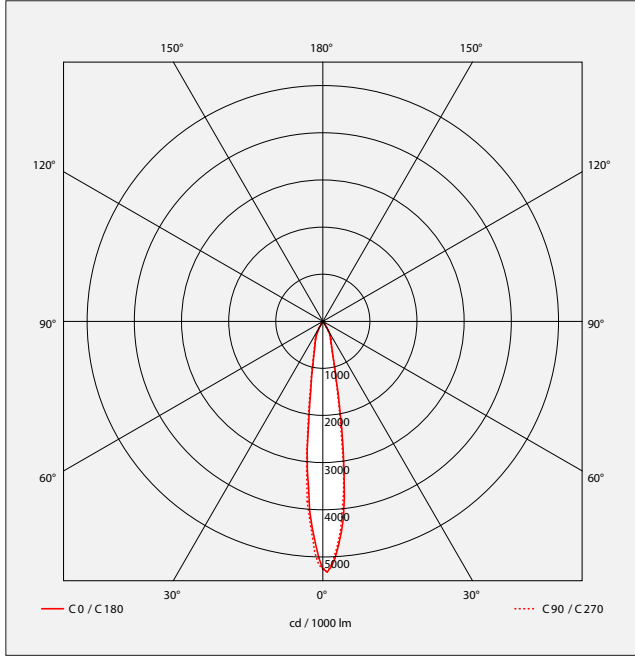

Beams 24°

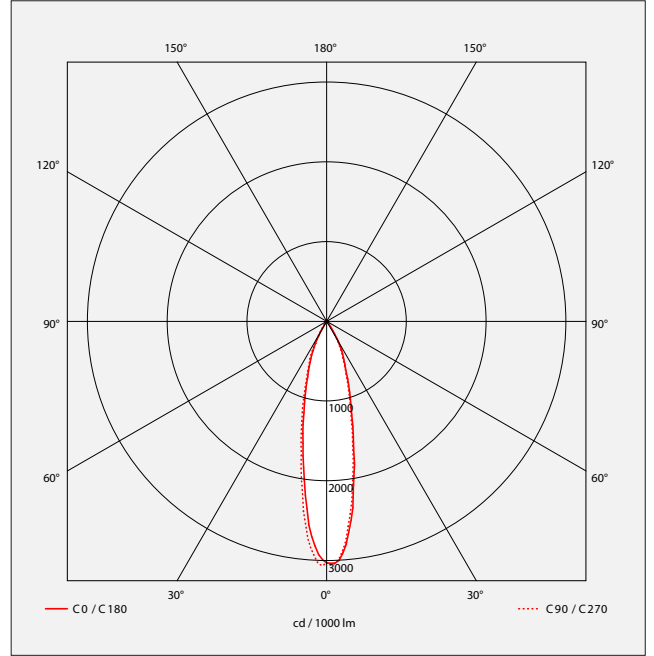

Beams 36°

