


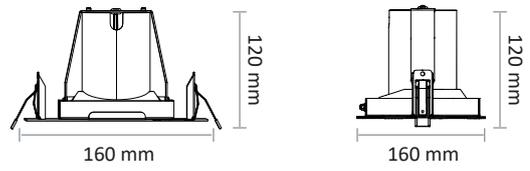


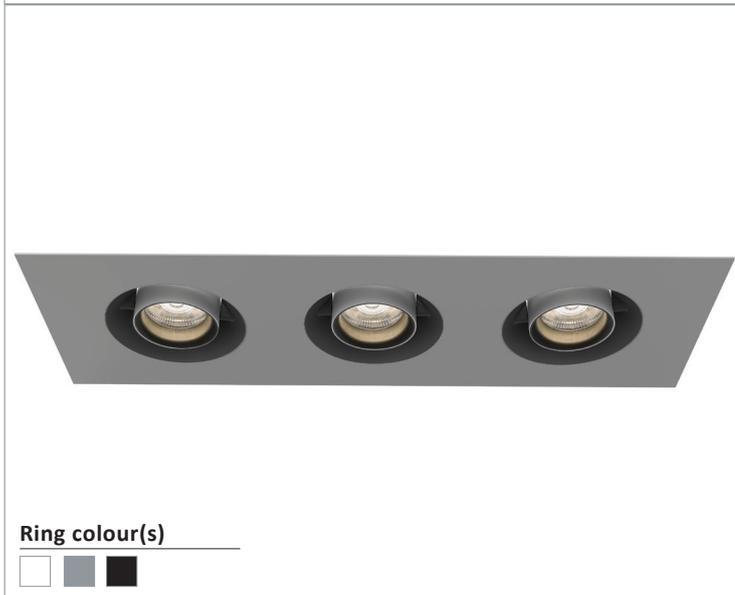



EO 5140-1B LED

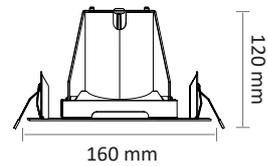

EO 5140-2B LED

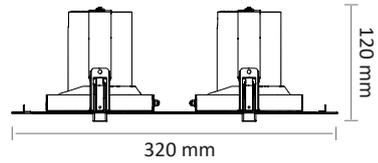

EO 5140-3B LED

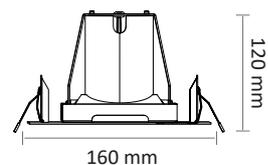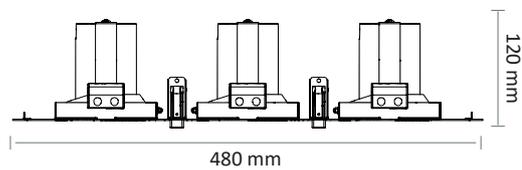

Ring colour(s)



5202/E17/20 : (AA/DD/WW) 5140/1

# EO 5140-1B2B3B LED

# ORIENTABLE AND ADJUSTABLE ■ LED

- Recessed orientable for LED SPOT module, up to 3x3 930 lumens
- CRI of 90
- MacAdam Ellipse : 2 SDCM
- Available in 2 700 K, 3 000 K, 3 500 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 152,5 lm/W
- Springs in pressure for easier installation
- Ring made of die-cast aluminium
- Polycarbonate lens optics
- **Weight** : Approx. 1,3 kg
- **Driver(s)** : Fixed, Dimmable DALI, Casambi, Connect
- **Option(s)** : Fast connector (CORD)
- Photobiological risk group 1

## Driver(s)



## Standards

Class I | IP 20 | 650° | RG1

## Beam(s)



## Option(s)



White ring  
White interior



Black ring  
White interior



Grey ring  
White interior



White ring  
Black interior



Black ring  
Black interior



Grey ring  
Black interior

## Performance of specialized lighting modules

ITEM	SECTION	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOURS TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
EO 5140-1B LED 3500-927	Boulangerie	24 W	27,9 W	3480 lumens	124,7 lm/W	2700 K	90	-
EO 5140-1B LED 2300-930	Boucherie	23,7 W	26,3 W	2297 lumens	87,2 lm/W	3000 K	90	-
EO 5140-2B LED 3500-927	Boulangerie	2x24 W	2x27,9 W	2x3480 lumens	124,7 lm/W	2700 K	90	-
EO 5140-2B LED 2300-930	Boucherie	2x23,7 W	2x26,3 W	2x2297 lumens	87,2 lm/W	3000 K	90	-
EO 5140-3B LED 3500-927	Boulangerie	3x24 W	3x27,9 W	3x3480 lumens	124,7 lm/W	2700 K	90	-
EO 5140-3B LED 2300-930	Boucherie	3x23,7 W	3x26,3 W	3x2297 lumens	87,2 lm/W	3000 K	90	-

## High efficiency performance of the components (HE) CRI 90 with R9&gt;80

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOURS TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
EO 5140-1B LED HE 3000-930	16,7 W	19,4 W	2956 lumens	152,2 lm/W	3000 K	90	E
EO 5140-1B LED HE 3000-935	16,7 W	19,4 W	2937 lumens	151,2 lm/W	3500 K	90	E
EO 5140-1B LED HE 3000-940	16,7 W	19,4 W	2961 lumens	152,5 lm/W	4000 K	90	E
EO 5140-1B LED HE 4000-930	24 W	27,9 W	3924 lumens	140,6 lm/W	3000 K	90	E
EO 5140-1B LED HE 4000-935	24 W	27,9 W	3899 lumens	139,7 lm/W	3000 K	90	E
EO 5140-1B LED HE 4000-940	24 W	27,9 W	3930 lumens	140,8 lm/W	4000 K	90	E
EO 5140-2B LED HE 3000-930	2x16,7 W	2x19,4 W	2x2956 lumens	152,2 lm/W	3000 K	90	E
EO 5140-2B LED HE 3000-935	2x16,7 W	2x19,4 W	2x2937 lumens	151,2 lm/W	3500 K	90	E
EO 5140-2B LED HE 3000-940	2x16,7 W	2x19,4 W	2x2961 lumens	152,5 lm/W	4000 K	90	E
EO 5140-2B LED HE 4000-930	2x24 W	2x27,9 W	2x3924 lumens	140,6 lm/W	3000 K	90	E
EO 5140-2B LED HE 4000-935	2x24 W	2x27,9 W	2x3899 lumens	139,7 lm/W	3000 K	90	E
EO 5140-2B LED HE 4000-940	2x24 W	2x27,9 W	2x3930 lumens	140,8 lm/W	4000 K	90	E
EO 5140-3B LED HE 3000-930	3x16,7 W	3x19,4 W	3x2956 lumens	152,2 lm/W	3000 K	90	E
EO 5140-3B LED HE 3000-935	3x16,7 W	3x19,4 W	3x2937 lumens	151,2 lm/W	3500 K	90	E
EO 5140-3B LED HE 3000-940	3x16,7 W	3x19,4 W	3x2961 lumens	152,5 lm/W	4000 K	90	E
EO 5140-3B LED HE 4000-930	3x24 W	3x27,9 W	3x3924 lumens	140,6 lm/W	3000 K	90	E
EO 5140-3B LED HE 4000-935	3x24 W	3x27,9 W	3x3899 lumens	139,7 lm/W	3000 K	90	E
EO 5140-3B LED HE 4000-940	3x24 W	3x27,9 W	3x3930 lumens	140,8 lm/W	4000 K	90	E