




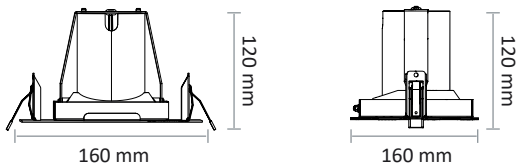



EO 5140-1C LED



EO 5140-2C LED

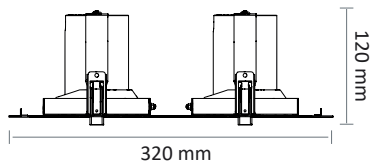

EO 5140-3C LED

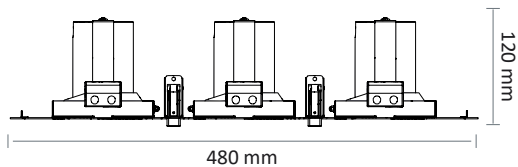

Ring colour(s)



EO 5140-1C2C3C LED

- Recessed orientable for LED SPOT module, maximum 3x2 400 lumens
- CRI of 95
- MacAdam Ellipse : 2 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 103,4 lm/W
- Springs in pressure for easier installation
- Painted steel ring
- Silicon lens optics
- **Weight** : Approx. 1,3 kg
- **Driver(s)** : Fixed, Dimmable DALI (CDIMMDALI), Casambi, Connect
- **Option(s)** : Fast connector (CORD)
- Photobiological risk group 1

Driver(s)




Standards

Class II | IP 20 | 650° | RG1


Beam(s)




Option(s)



White ring
White interior




Black ring
White interior




Grey ring
White interior



White ring
Black interior



Black ring
Black interior



Grey ring
Black interior

 EO 5140-1C2C3C LED

ITEM	POWER	CONSUMPTION	LIGHT EMITTING SURFACE	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	BEAM	EFFICIENCY ENERGY CLASS
EO 5140-1C LED 900-930	13,1 W	15 W	LES4	893 lumens	59,3 lm/W	3000 K	95	7°	F
EO 5140-1C LED 1000-940	13,1 W	15 W	LES4	987 lumens	65,5 lm/W	4000 K	95	7°	E
EO 5140-1C LED 950-930	8,8 W	11 W	LES6	965 lumens	87,7 lm/W	3000 K	95	10°/20°/35°	F
EO 5140-1C LED 1050-940	8,8 W	11 W	LES6	1047 lumens	95,2 lm/W	4000 K	95	10°/20°/35°	D
EO 5140-1C LED 1400-930	14,9 W	17,13 W	LES6	1381 lumens	80,6 lm/W	3000 K	95	10°/20°/35°	F
EO 5140-1C LED 1500-940	14,9 W	17,13 W	LES6	1498 lumens	87,5 lm/W	4000 K	95	10°/20°/35°	D
EO 5140-1C LED 2000-930	17,3 W	20,12 W	LES9	1885 lumens	93,7 lm/W	3000 K	95	15°/20°/35°	F
EO 5140-1C LED 2000-940	17,3 W	20,12 W	LES9	2080 lumens	103,4 lm/W	4000 K	95	15°/20°/35°	E
EO 5140-1C LED 2200-930	21,1 W	24,25 W	LES9	2175 lumens	89,7 lm/W	3000 K	95	15°/20°/35°	E
EO 5140-1C LED 2200-940	21,1 W	24,25 W	LES9	2400 lumens	98,95 lm/W	4000 K	95	15°/20°/35°	E
EO 5140-2C LED 900-930	2x13,1 W	2x15 W	LES4	2x893 lumens	59,3 lm/W	3000 K	95	7°	F
EO 5140-2C LED 1000-940	2x13,1 W	2x15 W	LES4	2x987 lumens	65,5 lm/W	4000 K	95	7°	E
EO 5140-2C LED 950-930	2x8,8 W	2x11 W	LES6	2x965 lumens	87,7 lm/W	3000 K	95	10°/20°/35°	F
EO 5140-2C LED 1050-940	2x8,8 W	2x11 W	LES6	2x1047 lumens	95,2 lm/W	4000 K	95	10°/20°/35°	D
EO 5140-2C LED 1400-930	2x14,9 W	2x17,13 W	LES6	2x1381 lumens	80,6 lm/W	3000 K	95	10°/20°/35°	F
EO 5140-2C LED 1500-940	2x14,9 W	2x17,13 W	LES6	2x1498 lumens	87,5 lm/W	4000 K	95	10°/20°/35°	D
EO 5140-2C LED 2000-930	17,3 W	2x20,12 W	LES9	2x1885 lumens	93,7 lm/W	3000 K	95	15°/20°/35°	F
EO 5140-2C LED 2000-940	17,3 W	2x20,12 W	LES9	2x2080 lumens	103,4 lm/W	4000 K	95	15°/20°/35°	E
EO 5140-2C LED 2200-930	21,1 W	2x24,25 W	LES9	2x2175 lumens	89,7 lm/W	3000 K	95	15°/20°/35°	E
EO 5140-2C LED 2200-940	21,1 W	2x24,25 W	LES9	2x2400 lumens	98,95 lm/W	4000 K	95	15°/20°/35°	E
EO 5140-3C LED 900-930	3x13,1 W	3x15 W	LES4	3x893 lumens	59,3 lm/W	3000 K	95	7°	F
EO 5140-3C LED 1000-940	3x13,1 W	3x15 W	LES4	3x987 lumens	65,5 lm/W	4000 K	95	7°	E
EO 5140-3C LED 950-930	3x8,8 W	3x11 W	LES6	3x965 lumens	87,7 lm/W	3000 K	95	10°/20°/35°	F
EO 5140-3C LED 1050-940	3x8,8 W	3x11 W	LES6	3x1047 lumens	95,2 lm/W	4000 K	95	10°/20°/35°	D
EO 5140-3C LED 1400-930	3x14,9 W	3x17,13 W	LES6	3x1381 lumens	80,6 lm/W	3000 K	95	10°/20°/35°	F
EO 5140-3C LED 1500-940	3x14,9 W	3x17,13 W	LES6	3x1498 lumens	87,5 lm/W	4000 K	95	10°/20°/35°	D
EO 5140-3C LED 2000-930	17,3 W	3x20,12 W	LES9	3x1885 lumens	93,7 lm/W	3000 K	95	15°/20°/35°	F
EO 5140-3C LED 2000-940	17,3 W	3x20,12 W	LES9	3x2080 lumens	103,4 lm/W	4000 K	95	15°/20°/35°	E
EO 5140-3C LED 2200-930	21,1 W	3x24,25 W	LES9	3x2175 lumens	89,7 lm/W	3000 K	95	15°/20°/35°	E
EO 5140-3C LED 2200-940	21,1 W	3x24,25 W	LES9	3x2400 lumens	98,95 lm/W	4000 K	95	15°/20°/35°	E