


LE 2316-A LED



Colour(s)

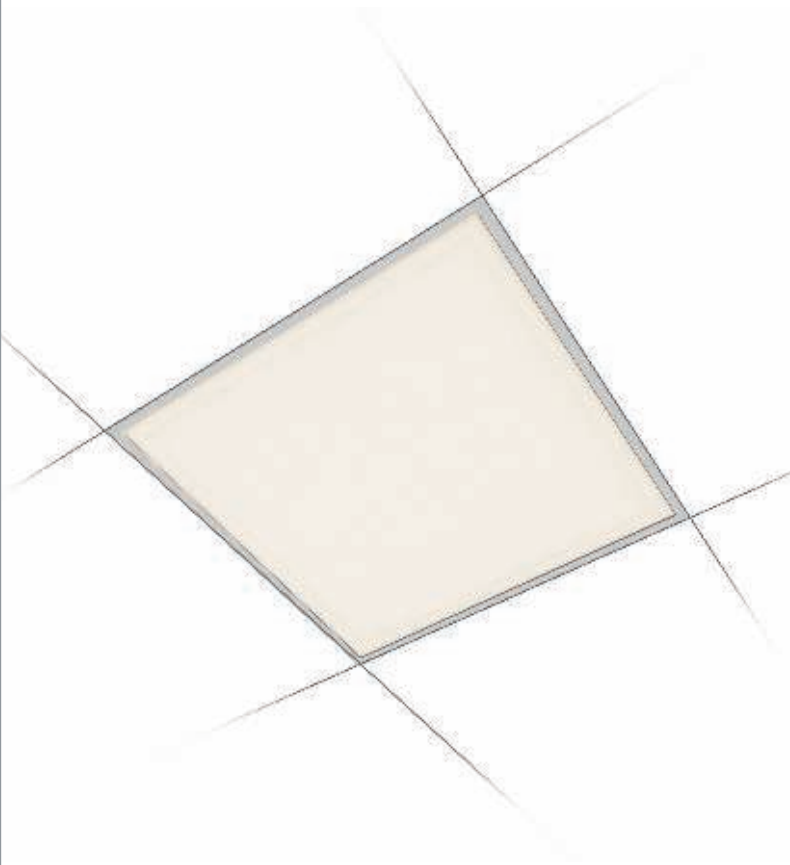

RECESSED LUMINAIRES ■ LED

- Recessed luminaire for LINEAR LED module, maximum 4357 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K, 3 500 K, 4 000 K and 6 500 K
- 50 000 hours lamp life (L80B20)
- Luminous efficiency of system up to 106 lm/W
- Micro prismatic Diffuser
- Lay-in (LI)
- Housing made of painted steel
- Static heat sink
- UGR < 19
- **Weight:** approx. 2,6 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** IP 65 built-in frame, Ready-to-mount kit (security wire, protection film) (KC)

Driver(s)



Standards



Class II | IP 40 | 650°

Beam(s)



Dimensions

LI



ITEM	CONSOMMATION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LE 2316-A LED-3200-830	32 W	3220 lumens	100 lm/W	3000 K	80	F
LE 2316-A LED-3300-835	32 W	3310 lumens	102,8 lm/W	3500 K	80	F
LE 2316-A LED-3400-840	32 W	3400 lumens	106 lm/W	4000 K	80	F
LE 2316-A LED-3400-865	32 W	3400 lumens	106 lm/W	6500 K	80	F
LE 2316-A LED-4100-830	43 W	4125 lumens	96 lm/W	3000 K	80	F
LE 2316-A LED-4200-835	43 W	4241 lumens	98,6 lm/W	3500 K	80	F
LE 2316-A LED-4300-840	43 W	4357 lumens	101 lm/W	4000 K	80	F
LE 2316-A LED-4300-865	43 W	4357 lumens	101 lm/W	6500 K	80	F