

LE 2316-C LED

RECESSED LUMINAIRES ■ LED

- Recessed luminaire for LINEAR LED module, maximum 4357 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 3 000 K, 4 000 K and 6 500 K
- 50 000 hours lamp life (L80B20)
- Luminous efficiency of system up to 106 lm/W
- Micro prismatic Diffuser
- Lay-in (LI)
- Housing made of painted steel
- Static heat sink
- **UGR < 19**
- **Weight:** approx. 2,8 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** IP 65 built-in frame, Ready-to-mount kit (security wire, protection film) (KC)

Driver(s)



Standards


Class II | IP 40 | 650°

Beam(s)



Dimensions

LI

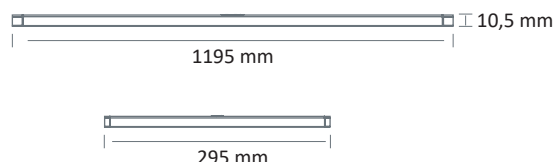

Colour(s)



ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LE 2316-C LED-3200-830	32W	3220 lumens	100 lm/W	3000 K	80	F
LE 2316-C LED-4100-830	43W	4125 lumens	96 lm/W	3000 K	80	F
LE 2316-C LED-3400-840	32W	3400 lumens	106 lm/W	4000 K	80	F
LE 2316-C LED-4300-840	43W	4357 lumens	101 lm/W	4000 K	80	F
LE 2316-C LED-3400-865	32W	3400 lumens	106 lm/W	6500 K	80	F
LE 2316-C LED-4300-865	43W	4357 lumens	101 lm/W	6500 K	80	F