

DL 2180 LED



Colour(s)



Ø110 mm



DOWNLIGHTS ■ LED

- Circular recessed orientable spotlight for LED SPOT module, maximum 3 629 lumens
- CRI of 80 or 90
- MacAdam Ellipse : 2 SDCM
- Available in 3 000 K and 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 147,9 lm/W
- Springs in pressure for easier installation
- Static heat sink
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions

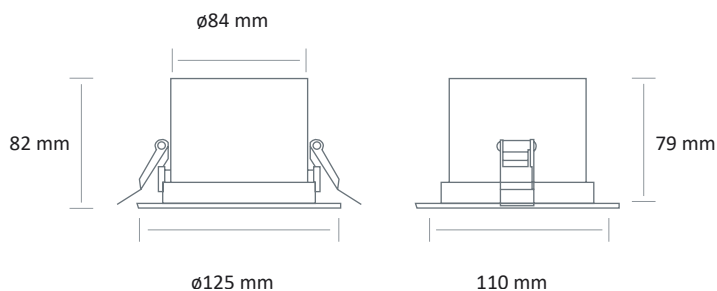

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
DL 2180 LED 1400-830	10W	1400 lumens	140 lm/W	3000 K	80	D
DL 2180 LED 1400-840	10W	1450 lumens	145 lm/W	4000 K	80	D
DL 2180 LED 1800-830	12W	1725 lumens	143,7 lm/W	3000 K	80	D
DL 2180 LED 1800-840	12W	1775 lumens	147,9 lm/W	4000 K	80	D
DL 2180 LED-2000-930	14W	1918 lumens	137,9 lm/W	3000 K	90	D
DL 2180 LED-2000-940	14W	2016 lumens	145 lm/W	4000 K	90	D
DL 2180 LED 2500-830	17W	2425 lumens	142,6 lm/W	3000 K	80	D
DL 2180 LED 2500-840	17W	2500 lumens	147 lm/W	4000 K	80	D
DL 2180 LED-3500-930	25,4W	3434 lumens	135,2 lm/W	3000 K	90	D
DL 2180 LED-3500-940	25,4W	3629 lumens	142,9 lm/W	4000 K	90	D