

EO 2181 LED



ORIENTABLE AND ADJUSTABLE ■ LED

- Circular recessed orientable spotlight for LED SPOT module, maximum 4 525 lumens
- CRI of 80 or 90
- MacAdam Ellipse : 2 SDCM
- Available in 2 700 K, 3 000 K, 3 500 K or 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 144 lm/W
- Springs in pressure for easier installation
- Static heat sink
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDA LI)

Driver(s)



Standards

Class I | IP 20 | 650°


Efficiency energy class



Beam(s)



Dimensions

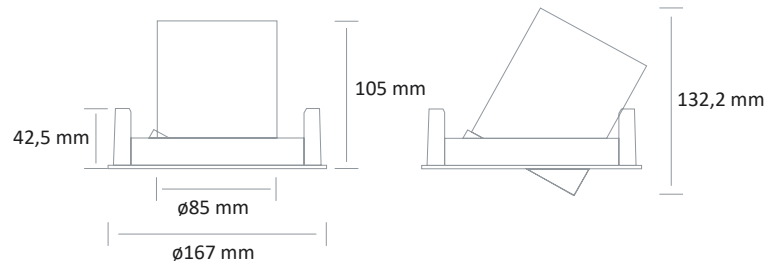

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI
EO 2181 LED 2500-927	19W	21W	2300 lumens	109,5 lm/W	2700 K	90
EO 2181 LED 2500-930	19W	21W	2400 lumens	114,3 lm/W	3000 K	90
EO 2181 LED 2500-935	19W	21W	2450 lumens	116,6 lm/W	3500 K	90
EO 2181 LED 2500-940	19W	21W	2575 lumens	122,6 lm/W	4000 K	90
EO 2181 LED 3000-830	19W	21W	2950 lumens	140,5 lm/W	3000 K	80
EO 2181 LED 3000-840	19W	21W	3025 lumens	144 lm/W	4000 K	80
EO 2181 LED 3000-927	24W	27W	2825 lumens	104,6 lm/W	2700 K	90
EO 2181 LED 3000-930	24W	27W	2925 lumens	108,3 lm/W	3000 K	90
EO 2181 LED 3000-935	24W	27W	2975 lumens	110,2 lm/W	3500 K	90
EO 2181 LED 3000-940	24W	27W	3125 lumens	115,7 lm/W	4000 K	90
EO 2181 LED 3500-830	24W	27W	3600 lumens	133,3 lm/W	3000 K	80
EO 2181 LED 3500-840	24W	27W	3700 lumens	137 lm/W	4000 K	80
EO 2181 LED 3500-927	32W	35W	3450 lumens	98,6 lm/W	2700 K	90
EO 2181 LED 3500-930	32W	35W	3600 lumens	102,9 lm/W	3000 K	90
EO 2181 LED 3500-935	32W	35W	3650 lumens	104,3 lm/W	3500 K	90
EO 2181 LED 3500-940	32W	35W	3850 lumens	110 lm/W	4000 K	90
EO 2181 LED 4500-830	32W	35W	4425 lumens	126,4 lm/W	3000 K	80
EO 2181 LED 4500-840	32W	35W	4525 lumens	129,3 lm/W	4000 K	80