

LS 2047-2 LED



Colour(s)



185x355 mm



SUSPENDED LUMINAIRES ■ LED

- Suspended spotlights for LED SPOT module, maximum 2 x 4 046 lumens
- CRI of 90
- MacAdam Ellipse : 3 SDCM
- Available in 2 700 K, 3 000 K, 3 500 K, 4 000 K and 5 000 K
- 50 000 hours lamp life (L80B50)
- Luminous efficiency of system up to 163 lm/W
- Housing made of painted steel
- Static heat sink
- Optical protection clear glass
- **Weight** : Approx. 5 kg
- **Number of projectors** : 2
- **Driver(s)** : Fixed, Dimmable DALI
- **Option(s)** : Fast connector (CORD), Colour filters (FIL)

Driver(s)




Standards

Class I | IP 20 | 650°

Beam(s)



Dimensions

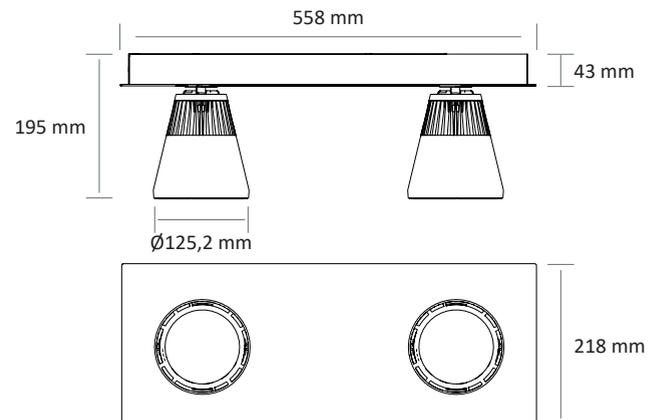

Performance of specialized lighting modules

ITEM	SECTION	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 2047-2 LED 3600-927	Boulangerie	2x24,1 W	2x26,8 W	2x3567 lumens	133,2 lm/W	2700 K	90	-
LS 2047-2 LED 2700-930	Boucherie	2x29,4 W	2x32,7 W	2x2733 lumens	83,7 lm/W	3000 K	90	-
LS 2047-2 LED 3000-950	Poissonnerie	2x16,8 W	2x18,5 W	2x3015 lumens	163 lm/W	5000 K	90	E
LS 2047-2 LED 4000-950	Poissonnerie	2x24,1 W	2x26,5 W	2x4046 lumens	152,7 lm/W	5000 K	90	E

High efficiency performance of the components (HE) CRI 90 with R9>80

ITEM	POWER	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 2047-2 LED HE 3000-930	2x16,8 W	2x18,7 W	2x3010 lumens	161,3 lm/W	3000 K	90	E
LS 2047-2 LED HE 3000-935	2x16,8 W	2x18,7 W	2x2991 lumens	160,2 lm/W	3500 K	90	E
LS 2047-2 LED HE 3000-940	2x16,8 W	2x18,7 W	2x3015 lumens	161,5 lm/W	4000 K	90	E
LS 2047-2 LED HE 4000-930	2x24,1 W	2x26,8 W	2x4016 lumens	150 lm/W	3000 K	90	E
LS 2047-2 LED HE 4000-935	2x24,1 W	2x26,8 W	2x3991 lumens	149 lm/W	3500 K	90	E
LS 2047-2 LED HE 4000-940	2x24,1 W	2x26,8 W	2x4023 lumens	150,2 lm/W	4000 K	90	E