

## LS 5130 LED



## SUSPENDED LUMINAIRES ■ LED

- Suspended luminaire for LED module, maximum 8 359 lumens
- CRI of 80
- MacAdam Ellipse: 3 SDCM
- Available in 4 000 K
- 50 000 hours lamp life (L80B10)
- Luminous efficiency of system up to 152,5 lm/W
- Housing made of extruded aluminium
- Opal (DO) diffuser made of polycarbonate
- Static heat sink
- **Weight:** approx. 4,6 kg
- **Driver(s):** Fixed, Dimmable driver DALI (CDIMMDALI)
- **Option(s):** Fast connector (CORD)

### Driver(s)




### Standards

Class I | IP 20 | 650°

### Beam(s)



### Dimensions

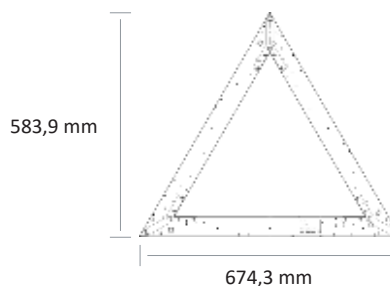

ITEM	CONSUMPTION	LUMINOUS FLUX	SYSTEM EFFICIENCY	COLOUR TEMPERATURE	CRI	EFFICIENCY ENERGY CLASS
LS 5130 LED 8300-840	54,8W	8359 lumens	152,5 lm/W	4000 K	80	C